


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:122.20V I:0.2830A P:34.400W PF:0.9950 Freq:60.00Hz Lamp Flux:4506.14x1 lm		
NAME: IX-TRS-22-36	TYPE:5000k	WEIGHT:
SPEC.:2X2FT	DIM.:	SERIAL No.:
MFR.:	SUR.:0.603*0.603	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 130.99 lm/W			
MODEL		Imax(cd)	1531	S/MH(C0/180)	1.25
NOMINAL POWER(W)	35	LOR(%)	100.0	S/MH(C90/270)	1.24
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	4506.1	η UP,DN(C0-180)	0.0,50.0
NOMINAL FLUX(lm)	4506.14	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,49.9
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)		η down(%)	99.9	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

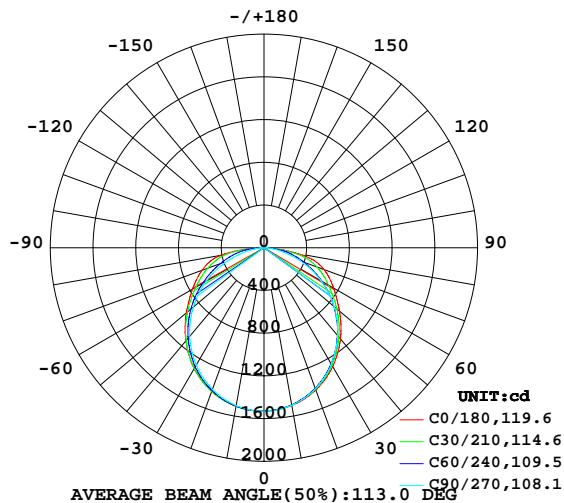

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

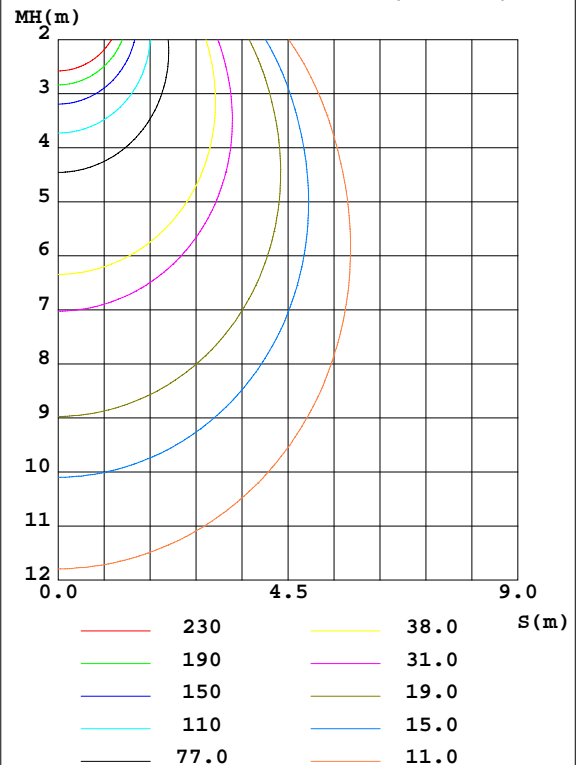

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-01-10

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:6.770m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	Φ lum, lamp
10	1498	1495	1497	1507	1507	1508	1502	1494	0- 10	144.6	144.6	3.21,3.21
20	1417	1405	1404	1428	1431	1428	1412	1403	10- 20	413.4	558.0	12.4,12.4
30	1286	1265	1261	1299	1307	1298	1268	1260	20- 30	623.8	1182	26.2,26.2
40	1114	1081	1074	1124	1138	1120	1083	1074	30- 40	747.1	1929	42.8,42.8
50	923.0	872.1	857.9	920.7	948.9	915.3	863.7	863.1	40- 50	771.6	2701	59.9,59.9
60	752.2	660.4	617.4	704.4	772.9	700.0	621.7	648.7	50- 60	705.0	3405	75.6,75.6
70	598.3	462.8	364.4	499.7	619.3	498.2	361.7	445.8	60- 70	575.1	3981	88.3,88.3
80	324.9	242.9	128.1	312.5	412.1	298.5	123.9	221.8	70- 80	397.5	4378	97.2,97.2
90	0.4094	0.3464	0.5434	25.49	1.337	2.116	0.4314	0.4455	80- 90	125.1	4503	99.9,99.9
100	0.3855	0.3286	0.2490	0.3189	0.4717	0.4045	0.2871	0.4095	90-100	0.7109	4504	99.9,99.9
110	0.3835	0.3407	0.2863	0.3425	0.4375	0.3885	0.2922	0.3614	100-110	0.3795	4504	100,100
120	0.4016	0.3804	0.3514	0.3684	0.3775	0.3620	0.3373	0.3664	110-120	0.3511	4505	100,100
130	0.4578	0.4430	0.4317	0.4276	0.4378	0.4227	0.4094	0.4377	120-130	0.3593	4505	100,100
140	0.4998	0.4959	0.4919	0.4802	0.4899	0.4798	0.4818	0.4949	130-140	0.3581	4505	100,100
150	0.5620	0.5491	0.5582	0.5350	0.5461	0.5401	0.5280	0.5500	140-150	0.3226	4506	100,100
160	0.6584	0.6525	0.6566	0.6344	0.6265	0.6485	0.6403	0.6424	150-160	0.2711	4506	100,100
170	0.7829	0.7649	0.7690	0.7524	0.7334	0.7228	0.7267	0.7057	160-170	0.1964	4506	100,100
180	0.7308	0.7257	0.7288	0.7157	0.7308	0.7227	0.7267	0.7127	170-180	0.0701	4506	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2023-01-10

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 γ Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.407.13
 Humidity:50.0%
 Test Distance:6.770m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:122.20V I:0.2830A P:34.400W PF:0.9950 Freq:60.00Hz Lamp Flux:4506.14x1 lm		
NAME: IX-TRS-22-36	TYPE:5000k	WEIGHT:
SPEC.:2X2FT	DIM.:	SERIAL No.:
MFR.:	SUR.:0.603*0.603	Shielding Angle:

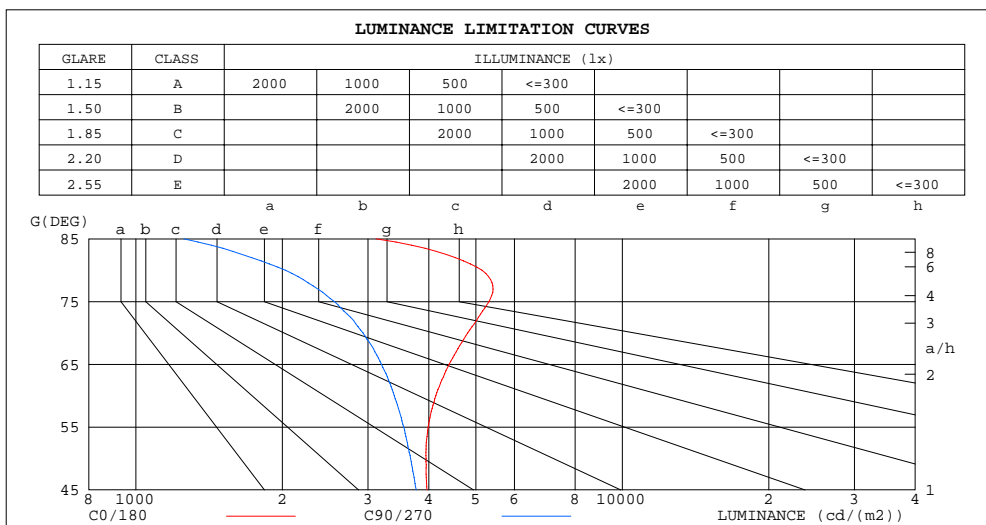

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	3116	1256
80	5145	2029
75	5318	2558
70	4811	2931
65	4406	3197
60	4137	3396
55	3989	3554
50	3949	3671
45	3965	3772


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-01-10

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:6.770m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:122.20V I:0.2830A P:34.400W PF:0.9950 Freq:60.00Hz Lamp Flux:4506.14x1 lm		
NAME: IX-TRS-22-36	TYPE:5000k	WEIGHT:
SPEC.:2X2FT	DIM.:	SERIAL No.:
MFR.:	SUR.:0.603*0.603	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.03	.98	.94	1.01	.96	.93	.96	.93	.90	.92	.89	.87	.89	.86	.84	.82
2.0	.89	.82	.76	.87	.81	.75	.84	.78	.73	.80	.76	.71	.77	.73	.70	.68
3.0	.78	.69	.63	.76	.68	.62	.73	.67	.61	.70	.65	.60	.68	.63	.59	.57
4.0	.69	.60	.53	.68	.59	.52	.65	.58	.52	.63	.56	.51	.60	.55	.50	.48
5.0	.61	.52	.45	.60	.52	.45	.58	.50	.45	.56	.49	.44	.54	.48	.44	.41
6.0	.55	.46	.40	.54	.46	.39	.52	.45	.39	.51	.44	.39	.49	.43	.38	.36
7.0	.50	.41	.35	.49	.41	.35	.48	.40	.34	.46	.39	.34	.45	.39	.34	.32
8.0	.46	.37	.31	.45	.37	.31	.44	.36	.31	.42	.36	.31	.41	.35	.30	.28
9.0	.42	.34	.28	.41	.33	.28	.40	.33	.28	.39	.32	.28	.38	.32	.27	.26
10.0	.39	.31	.25	.38	.30	.25	.37	.30	.25	.36	.30	.25	.35	.29	.25	.23

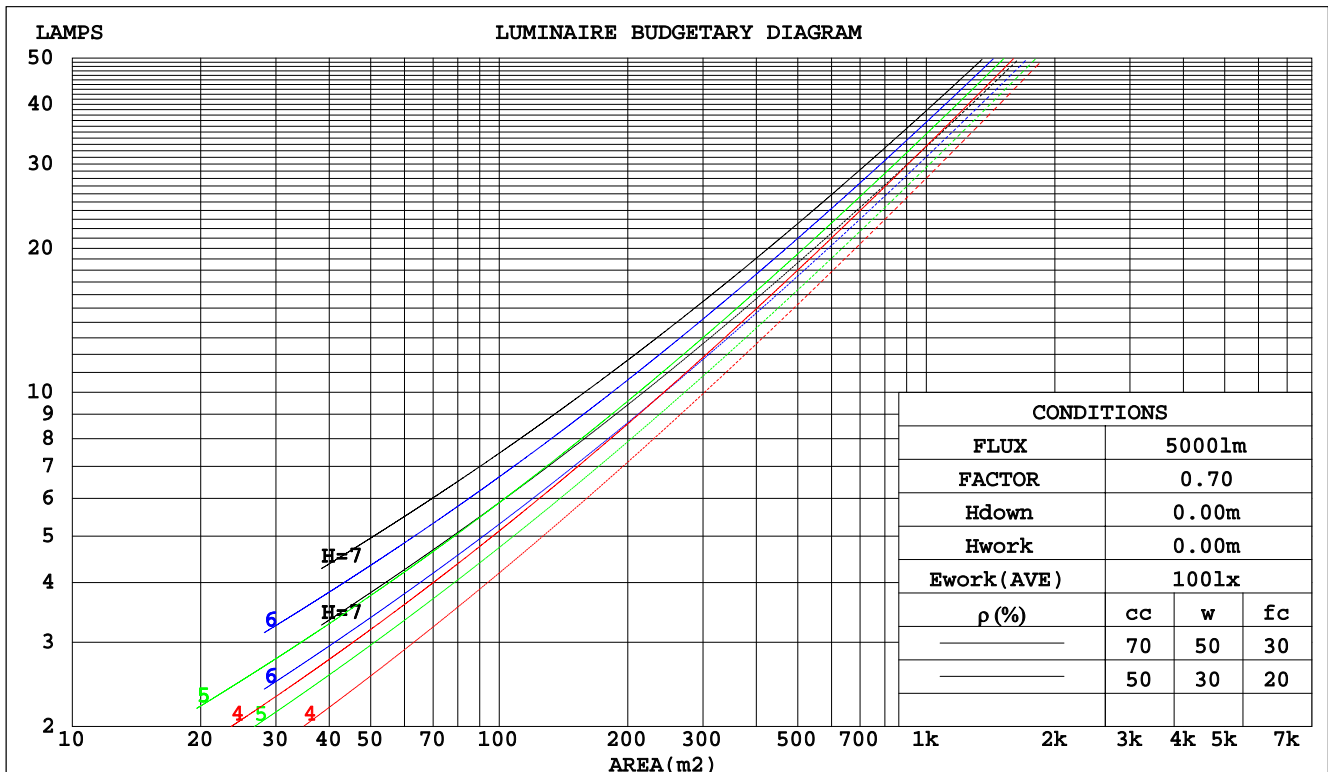

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-01-10

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:6.770m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:122.20V I:0.2830A P:34.400W PF:0.9950 Freq:60.00Hz Lamp Flux:4506.14x1 lm					
NAME: IX-TRS-22-36			TYPE:5000k		WEIGHT:
SPEC.:2X2FT			DIM.:		SERIAL No.:
MFR.:			SUR.:0.603*0.603		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.329	.187	.059	.322	.184	.058	.308	.177	.056	.296	.171	.055	.285	.165	.053	
2.0	.305	.167	.051	.298	.164	.051	.286	.159	.049	.275	.155	.048	.265	.150	.047	
3.0	.279	.149	.044	.273	.146	.044	.263	.143	.043	.253	.139	.043	.244	.135	.042	
4.0	.256	.133	.039	.251	.131	.039	.242	.128	.038	.233	.125	.038	.225	.122	.037	
5.0	.235	.120	.035	.231	.119	.035	.223	.116	.034	.215	.113	.034	.208	.111	.033	
6.0	.217	.109	.031	.214	.108	.031	.206	.106	.031	.199	.104	.030	.193	.102	.030	
7.0	.202	.100	.028	.198	.099	.028	.192	.097	.028	.186	.095	.028	.180	.093	.027	
8.0	.188	.092	.026	.185	.091	.026	.179	.089	.026	.174	.088	.025	.168	.086	.025	
9.0	.176	.085	.024	.173	.084	.024	.168	.083	.024	.163	.082	.023	.158	.080	.023	
10.0	.165	.079	.022	.163	.079	.022	.158	.077	.022	.153	.076	.022	.149	.075	.022	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.182	.156	.133	.156	.134	.115	.107	.092	.079	.061	.053	.046	.020	.017	.015	
2.0	.174	.132	.097	.149	.114	.084	.102	.079	.058	.059	.046	.034	.019	.015	.011	
3.0	.167	.115	.074	.143	.099	.064	.098	.069	.045	.057	.040	.026	.018	.013	.009	
4.0	.159	.102	.058	.136	.088	.050	.094	.061	.035	.054	.036	.021	.017	.012	.007	
5.0	.151	.091	.047	.130	.079	.041	.090	.055	.029	.052	.032	.017	.017	.011	.006	
6.0	.144	.083	.039	.124	.072	.034	.085	.050	.024	.050	.030	.014	.016	.010	.005	
7.0	.137	.076	.033	.118	.066	.029	.081	.046	.021	.047	.027	.012	.015	.009	.004	
8.0	.130	.070	.029	.112	.061	.025	.078	.043	.018	.045	.025	.011	.015	.008	.004	
9.0	.124	.065	.026	.107	.057	.022	.074	.040	.016	.043	.024	.009	.014	.008	.003	
10.0	.118	.061	.023	.102	.053	.020	.071	.037	.014	.041	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2023-01-10

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.407.13
 Humidity:50.0%
 Test Distance:6.770m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:122.20V I:0.2830A P:34.400W PF:0.9950 Freq:60.00Hz Lamp Flux:4506.14x1 lm											
NAME: IX-TRS-22-36						TYPE:5000k			WEIGHT:		
SPEC.:2X2FT						DIM.:			SERIAL No.:		
MFR.:						SUR.:0.603*0.603			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	17.7	19.3	18.0	19.5	19.7	16.9	18.5	17.2	18.7	18.9	
	3H	19.9	21.4	20.2	21.6	21.8	18.4	19.8	18.7	20.0	
	4H	21.1	22.4	21.4	22.7	22.9	18.9	20.3	19.2	20.5	
	6H	22.0	23.3	22.3	23.5	23.8	19.2	20.5	19.6	20.8	
	8H	22.2	23.5	22.6	23.8	24.1	19.3	20.6	19.7	20.8	
	12H	22.3	23.5	22.7	23.8	24.1	19.3	20.5	19.7	20.8	
4H	2H	18.3	19.7	18.6	19.9	20.2	17.7	19.1	18.0	19.3	
	3H	20.7	21.9	21.1	22.2	22.5	19.3	20.5	19.7	20.8	
	4H	22.0	23.1	22.4	23.5	23.8	20.0	21.1	20.4	21.4	
	6H	23.1	24.1	23.5	24.4	24.8	20.5	21.5	20.9	21.8	
	8H	23.4	24.3	23.8	24.7	25.1	20.6	21.5	21.0	21.9	
	12H	23.5	24.4	24.0	24.8	25.2	20.6	21.5	21.1	21.9	
8H	4H	22.3	23.2	22.7	23.6	24.0	20.5	21.5	20.9	21.8	
	6H	23.5	24.3	24.0	24.7	25.2	21.2	22.0	21.7	22.4	
	8H	23.9	24.6	24.4	25.1	25.5	21.4	22.1	21.9	22.5	
	12H	24.1	24.7	24.6	25.2	25.7	21.5	22.1	22.0	22.6	
12H	4H	22.3	23.1	22.7	23.5	23.9	20.6	21.5	21.1	21.9	
	6H	23.6	24.3	24.1	24.7	25.2	21.4	22.1	21.8	22.5	
	8H	24.0	24.6	24.5	25.1	25.5	21.6	22.2	22.1	22.7	
Variations with the observer position at spacings:											
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.2					
1.5H	+ 0.1 / - 0.2					+ 0.2 / - 0.3					
2.0H	+ 0.1 / - 0.2					+ 0.2 / - 0.3					

CIE Pub.117, 4506 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 5.2$)
Area: 0.3636 m²

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-01-10

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:6.770m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:122.20V I:0.2830A P:34.400W PF:0.9950 Freq:60.00Hz Lamp Flux:4506.14x1 lm		
NAME: IX-TRS-22-36	TYPE:5000k	WEIGHT:
SPEC.:2X2FT	DIM.:	SERIAL No.:
MFR.:	SUR.:0.603*0.603	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	57	45	38	56	45	38	55	44	38	31
0.80	67	55	47	65	54	47	64	53	47	40
1.00	75	63	56	73	63	56	71	64	55	48
1.25	82	71	64	80	70	63	78	69	62	55
1.50	87	76	69	85	76	69	82	74	68	60
2.00	94	85	78	92	84	77	88	81	76	68
2.50	98	90	83	96	88	82	92	85	80	72
3.00	101	94	88	99	92	87	95	89	85	76
4.00	105	99	94	103	98	93	99	94	90	81
5.00	108	103	98	105	101	97	101	97	94	84
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2023-01-10

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.407.13
 Humidity:50.0%
 Test Distance:6.770m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:122.20V I:0.2830A P:34.400W PF:0.9950 Freq:60.00Hz Lamp Flux:4506.14x1 lm		
NAME: IX-TRS-22-36	TYPE:5000k	WEIGHT:
SPEC.:2X2FT	DIM.:	SERIAL No.:
MFR.:	SUR.:0.603*0.603	Shielding Angle:

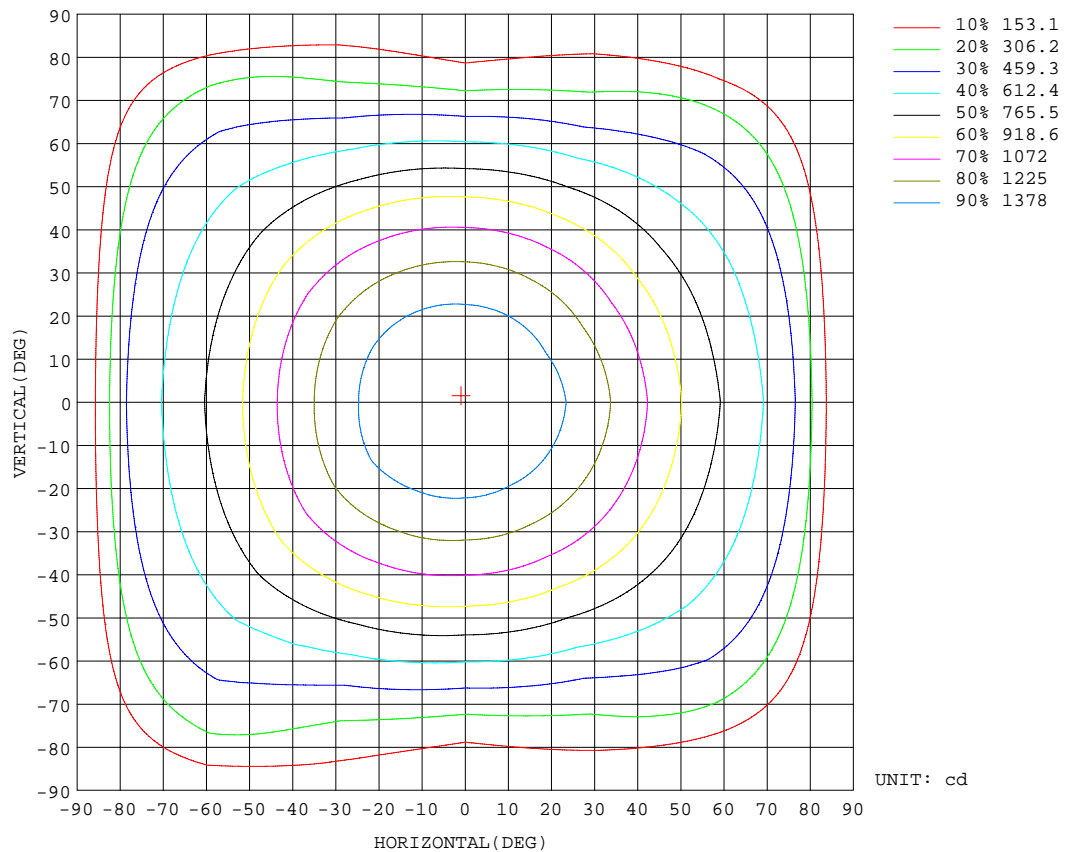


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-01-10

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:6.770m [K=1.0000]
Remarks:

AAI CURVES

Test:U:122.20V I:0.2830A P:34.400W PF:0.9950 Freq:60.00Hz Lamp Flux:4506.14x1 lm		
NAME: IX-TRS-22-36	TYPE:5000k	WEIGHT:
SPEC.:2X2FT	DIM.:	SERIAL No.:
MFR.:	SUR.:0.603*0.603	Shielding Angle:

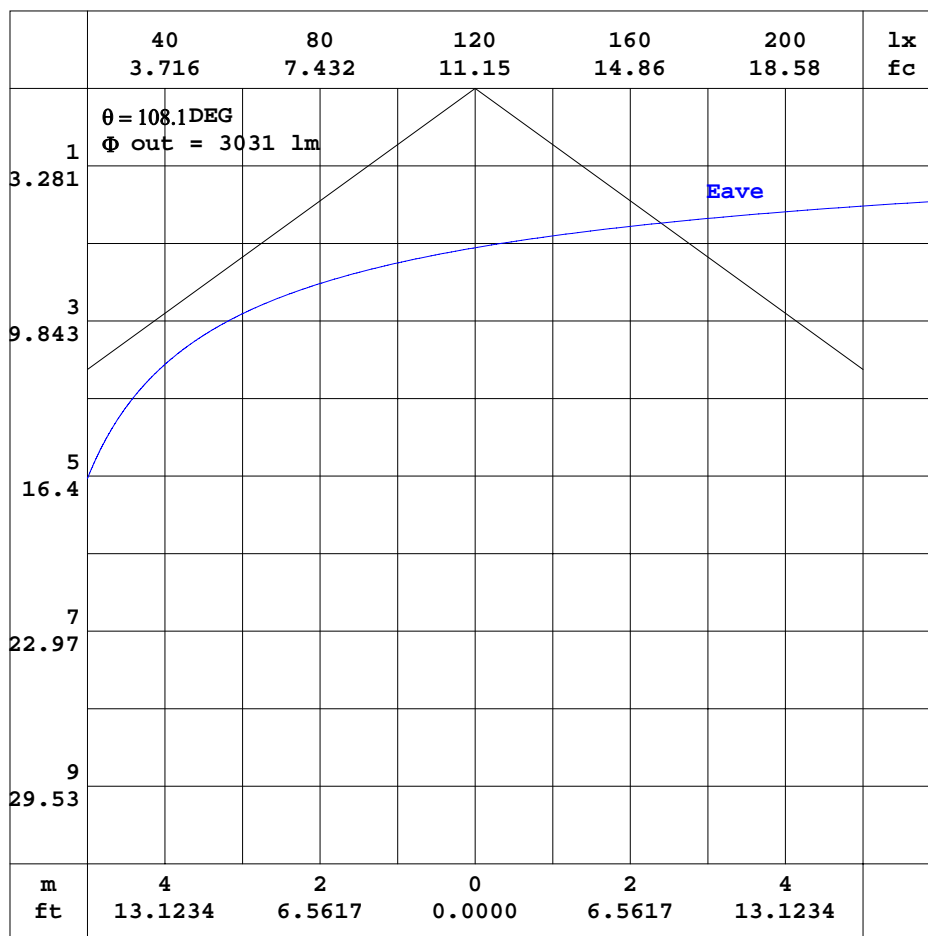


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2023-01-10

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.407.13
 Humidity: 50.0%
 Test Distance: 6.770m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:122.20V I:0.2830A P:34.400W PF:0.9950 Freq:60.00Hz Lamp Flux:4506.14x1 lm		
NAME: IX-TRS-22-36	TYPE:5000k	WEIGHT:
SPEC.:2X2FT	DIM.:	SERIAL No.:
MFR.:	SUR.:0.603*0.603	Shielding Angle:

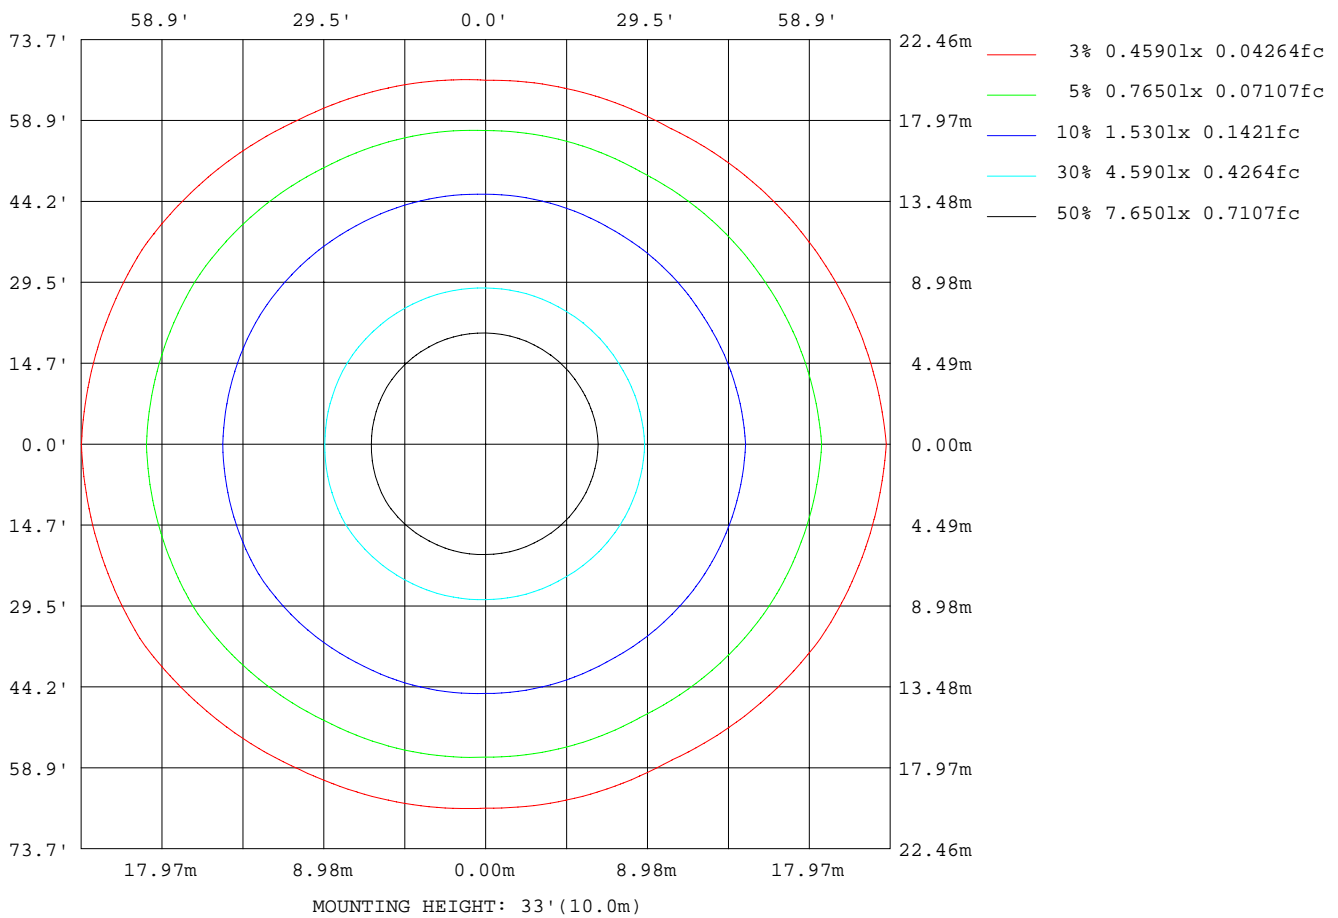

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2023-01-10

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.407.13
Humidity: 50.0%
Test Distance: 6.770m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:122.20V I:0.2830A P:34.400W PF:0.9950 Freq:60.00Hz Lamp Flux:4506.14x1 lm		
NAME: IX-TRS-22-36	TYPE:5000k	WEIGHT:
SPEC.:2X2FT	DIM.:	SERIAL No.:
MFR.:	SUR.:0.603*0.603	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	4465
L_0~180(75)av	5506
L_0~180(85)av	4520
L_90~270(65)av	3199
L_90~270(75)av	2532
L_90~270(85)av	1221
L_45(65)av	3742
L_45(75)av	4037
L_45(85)av	3752

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2023-01-10

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:6.770m [K=1.0000]
Remarks:

Planar Illuminance Curve

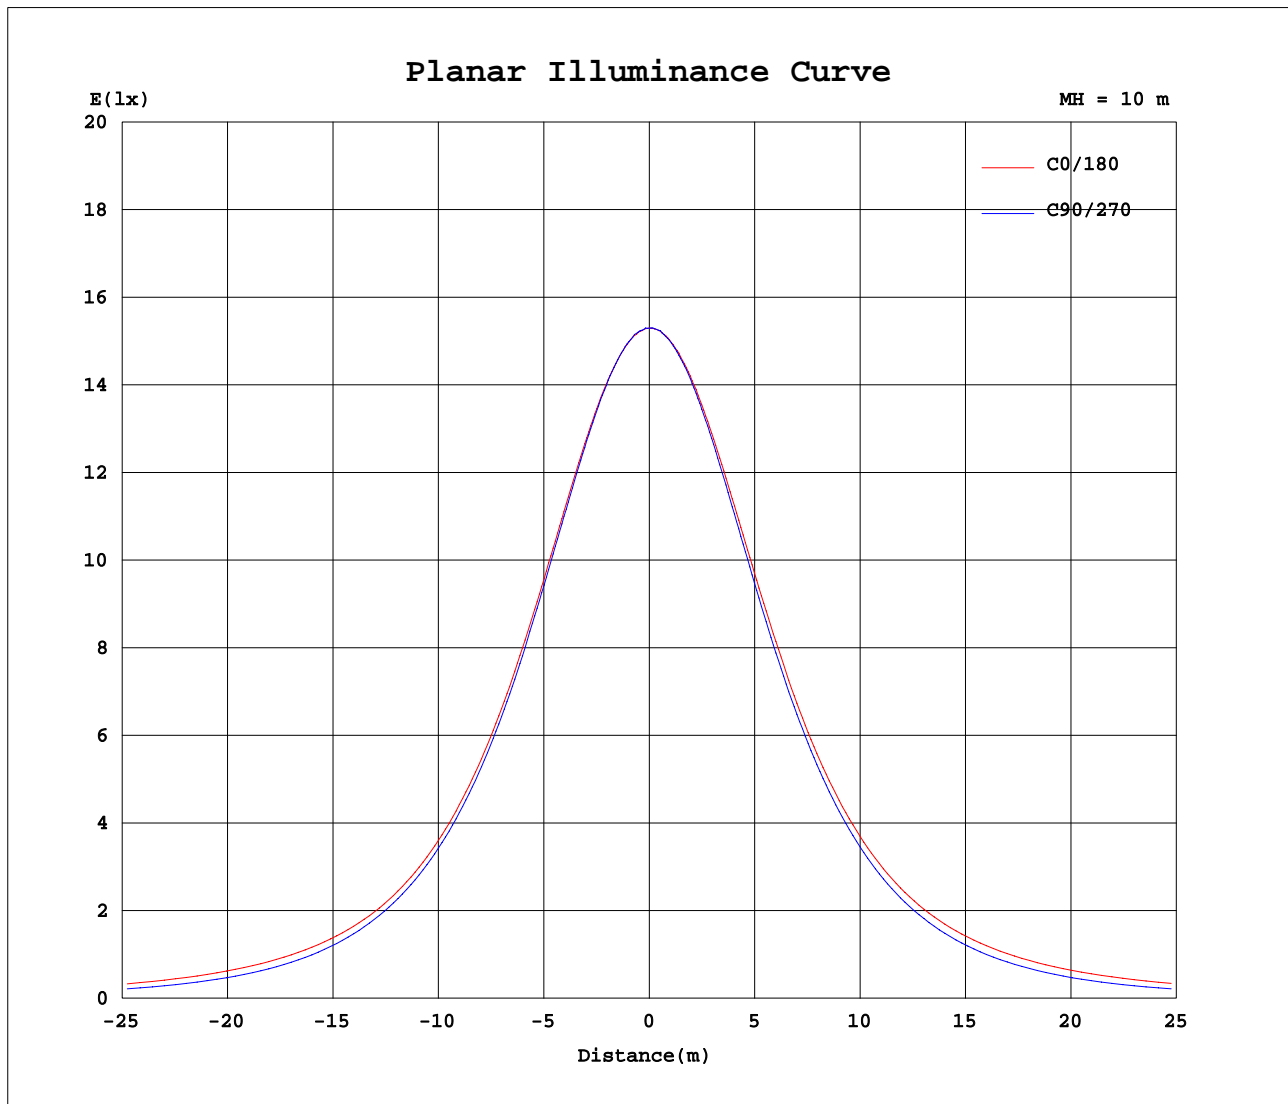

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2023-01-10

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.407.13
Humidity: 50.0%
Test Distance: 6.770m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:122.20V I:0.2830A P:34.400W PF:0.9950 Freq:60.00Hz Lamp Flux:4506.14x1 lm																	
NAME: IX-TRS-22-36									TYPE:5000k						WEIGHT:		
SPEC.:2X2FT									DIM.:						SERIAL No.:		
MFR.:									SUR.:0.603*0.603						Shielding Angle:		

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1530	1530	1531	1530	1530	1528	1530	1530	1531	1530	1530	1528						
5	1521	1519	1520	1521	1524	1526	1525	1526	1525	1524	1521	1517						
10	1498	1496	1494	1497	1502	1511	1507	1508	1507	1502	1496	1491						
15	1464	1459	1454	1458	1467	1482	1475	1477	1473	1464	1458	1452						
20	1417	1408	1401	1404	1419	1437	1431	1433	1424	1412	1406	1400						
25	1356	1347	1335	1339	1356	1384	1374	1375	1363	1347	1339	1335						
30	1286	1273	1256	1261	1282	1316	1307	1307	1289	1268	1261	1259						
35	1203	1184	1168	1170	1197	1235	1225	1225	1201	1180	1171	1171						
40	1114	1091	1070	1074	1102	1147	1138	1135	1106	1083	1072	1076						
45	1019	992	966	970	1001	1051	1046	1038	1004	977	967	975						
50	923	891	854	858	892	950	949	937	894	864	855	871						
55	832	790	741	741	778	848	856	832	780	745	738	771						
60	752	696	625	617	662	747	773	737	663	622	620	677						
65	677	612	506	491	547	657	695	648	547	492	504	590						
70	598	528	397	364	428	571	619	562	435	362	392	500						
75	500	434	297	241	325	486	536	470	332	236	290	404						
80	325	285	201	128	231	394	412	362	235	124	195	249						
85	98.8	78.2	66.9	39.8	135	241	188	160	118	37.6	75.6	52.2						
90	0.41	0.38	0.31	0.54	11.3	39.7	1.34	2.47	1.76	0.43	0.40	0.49						
95	0.42	0.36	0.30	0.24	0.29	0.33	0.47	0.45	0.37	0.30	0.36	0.48						
100	0.39	0.35	0.30	0.25	0.29	0.35	0.47	0.45	0.36	0.29	0.35	0.47						
105	0.39	0.36	0.31	0.26	0.30	0.36	0.48	0.45	0.35	0.29	0.34	0.44						
110	0.38	0.36	0.32	0.29	0.32	0.37	0.44	0.43	0.35	0.29	0.34	0.39						
115	0.38	0.36	0.34	0.32	0.33	0.37	0.39	0.37	0.34	0.30	0.33	0.37						
120	0.40	0.39	0.37	0.35	0.36	0.38	0.38	0.37	0.35	0.34	0.34	0.39						
125	0.43	0.42	0.41	0.39	0.39	0.41	0.41	0.40	0.38	0.37	0.38	0.43						
130	0.46	0.44	0.44	0.43	0.42	0.43	0.44	0.43	0.41	0.41	0.42	0.46						
135	0.48	0.47	0.47	0.46	0.45	0.46	0.47	0.46	0.45	0.45	0.45	0.49						
140	0.50	0.50	0.50	0.49	0.48	0.48	0.49	0.48	0.48	0.48	0.48	0.51						
145	0.53	0.52	0.52	0.52	0.51	0.50	0.51	0.50	0.51	0.51	0.50	0.53						
150	0.56	0.55	0.54	0.56	0.54	0.53	0.55	0.53	0.55	0.53	0.53	0.57						
155	0.60	0.59	0.59	0.60	0.59	0.57	0.57	0.57	0.59	0.58	0.57	0.60						
160	0.66	0.65	0.66	0.66	0.64	0.63	0.63	0.65	0.65	0.64	0.62	0.66						
165	0.73	0.71	0.72	0.72	0.70	0.70	0.70	0.70	0.69	0.69	0.67	0.68						
170	0.78	0.76	0.77	0.77	0.75	0.75	0.73	0.73	0.72	0.73	0.71	0.70						
175	0.77	0.75	0.77	0.76	0.74	0.76	0.70	0.69	0.69	0.69	0.69	0.68						
180	0.73	0.71	0.74	0.73	0.71	0.72	0.73	0.72	0.73	0.73	0.71	0.72						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2023-01-10

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.407.13
 Humidity:50.0%
 Test Distance:6.770m [K=1.0000]
 Remarks: