

CIRCA

INSTALLATION INSTRUCTIONS

Cautions:

1. Do not use the electric generator to test the LED light.
2. Please abide by related country, regional and local law and regulations when install this fixture.
3. Please turn off the power before installation or maintenance.
4. Proper grounding is required to ensure safety.

Notice:

1. To avoid possibility of electrical shock or fire, the installation personnel must have professional electric knowledge.
2. Please wear gloves to avoid injury before installation.
3. If any smoke or spark of the wire happened, please turn off the power immediately and notify relevant personnel.
4. Please use listed water proof strain relief bushing when connecting the supply cord to the outlet box.


Attention:

1. Please check if there is any damage during shipping. If so, please contact manufacturer immediately.
 2. Please read the installation instructions carefully to check whether all the accessories are complete.
- After confirmation, then install the fixture according to installation steps.

Wiring Diagram & Instruction:

This led highbay light can be equipped with optional DC motion sensor, and is available with 0-10V dimming function, with the following 3 dimming solutions:

1. 0-10V dimming,
2. Intelligent dimming with DC motion sensor,
3. Pre-install tool-free handling DC motion sensor dimming module, and choose dimming function freely.

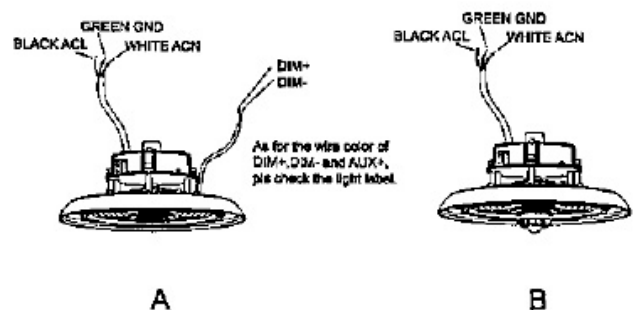

Please use the dimming+, dimming- (DC 10V) marking leads to connect to outside dimmer.
The pink wire with shrinkable tubing can not be damaged (no connection).

Class 1 Wiring Only.

Please assure a cumulative leakage current of less than 3.5mA on the control circuit.

Installation Methods: Hook Mount, Ceiling Mount, 1/2"NPT Mount. (Please choose the most suitable installation method for the purchased product as per your needs).

Hook Mount:

1. Screw the hook into the fixture, tighten and secure it. (figure 1)
2. Hang the fixture on the ceiling hook or chain. (figure 2)
3. After installation, connect the wire of the fixture to the corresponding mains according to local wiring rules, ensure the connection is secure and with a clean connection.

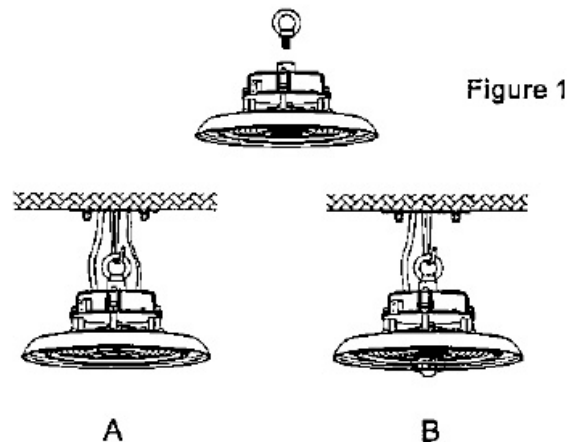


Figure 2

Installation Instructions

Ceiling Mount:

1. Mark with a pen or sharp tool on the mounting surface and drill. (figure 3)
2. Fix screws into the holes with a hammer. (figure 4)
3. Align the bracket hole with screw hole (figure 5), and push the fixture to one side (figure 6) and secure it.
4. After installation, connect the wire of the fixture to the corresponding mains according to local wiring rules, ensure the connection is secure and has a clean connection. By adjusting the brackets screws, users can adjust 50° to the left or right vertically. (figure 7)




Figure 3




Figure 4




Figure 5




Figure 6




Figure 7




Figure 8

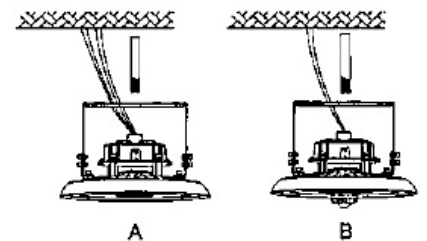


Figure 9




Figure 10




Figure 11

1/2" NPT Mount:

1. Unscrew the nuts on 1/2" NPT. (figure 8)
2. Insert 1/2" NPT stem into the bracket hole. (figure 9)
3. Re-screw the nuts. (figure 10)
4. After installation, connect the wire of the fixture to the corresponding mains according to local wiring rules, ensure the connection is secure and has a clean connection. By adjusting the brackets screws, users can adjust 50° to the left or right vertically. (figure 11)

Installation of DC motion sensor:

Figure12-1. If fixture has sensor receptacle installed, screw the 1/2" knockout out with screw driver by the illustrated direction, and screw the sensor kit on. The sensor is set in universal mode (refer to sensor spec sheet), the setting is programmable via remote control (the remote control is not included in standard packing.)

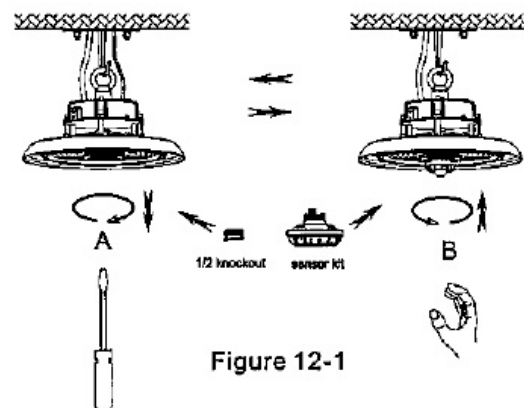


Figure 12-1

Installation Instructions

Optional Function:

The fixture has integrated function of 2 CCT selectable and 3 Power selectable. The setting could be customized. Operation: Take away the water-proof gasket, adjust dip switch to choose CCT and Power as per sign. The original setting could be either as factory default or customized request (Figure 12-2).

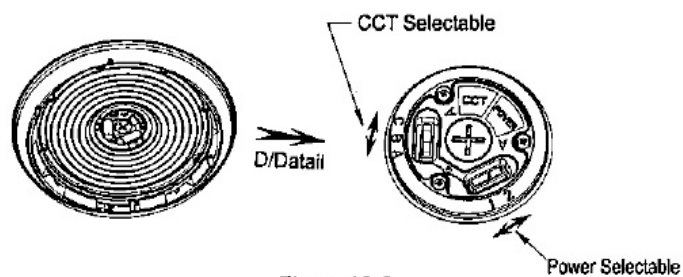


Figure 12-2