


INTRINSIX

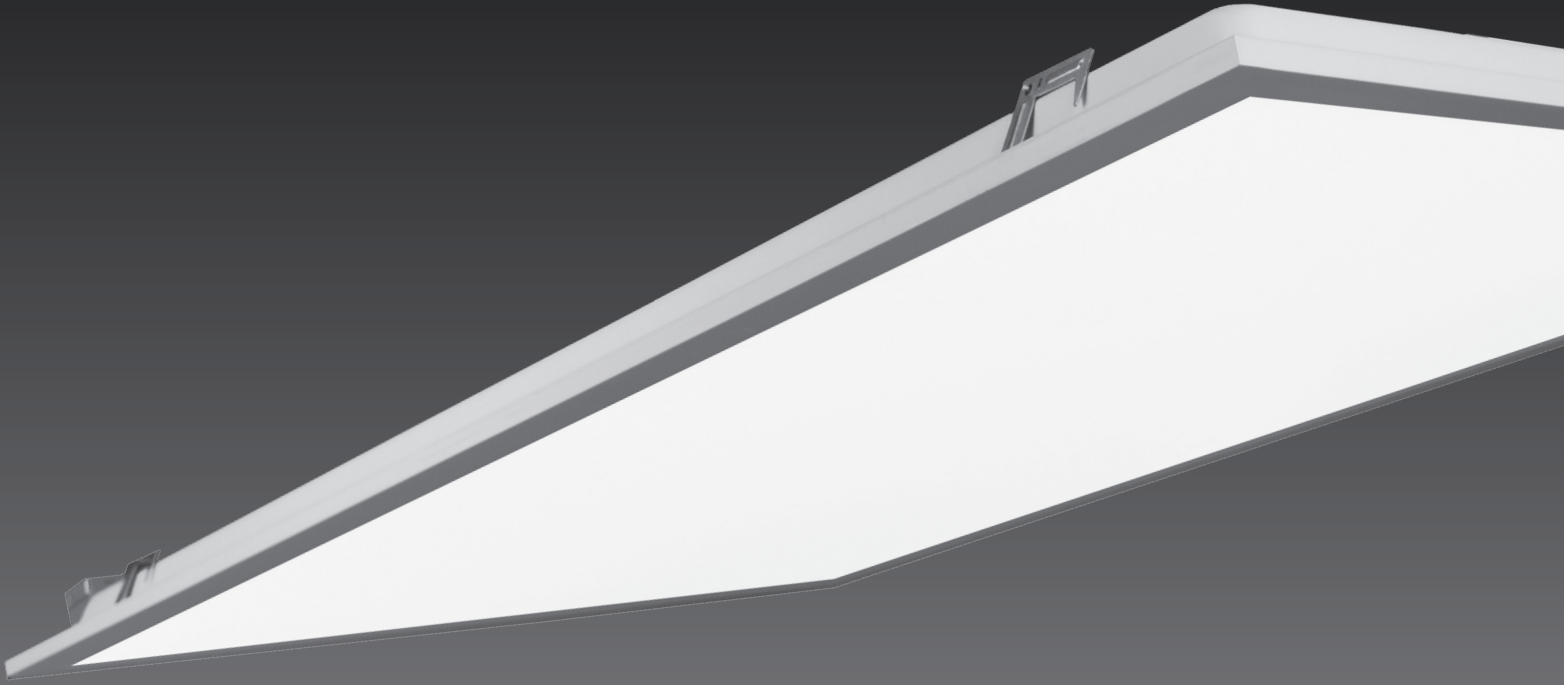

VISTA-BLE

BLUETOOTH LED TROFFER

PRODUCT PROFILE

BLE-VISTA

BLUETOOTH LED



XONE READY VISTA. FUTUREPROOFING LIGHTING TECHNOLOGY.

Description

The latest generation Intrinsic VISTA Series has taken another technological leap forward with Bluetooth integration giving you the ability to operate from a cellphone, tablet or PC.

You can depend on an energy efficient design, an ultra-slim panel light fixture which is perfect for renovations or new construction projects that require code compliant energy saving flat panel LED solutions. It also has a smart, smooth, and equal light distribution that ensures a wonderfully illuminated room.


Our VISTA Series LED back lit Light Panel is a flat LED panel ceiling light designed for commercial and industrial applications that require long-lasting efficient lighting such as retail, healthcare, office and hospitality.

Specifications

- CCT: 3,000/3,500/4,000/5,000K
- Dimming: 0-10V
- Voltage: 120 to 277V, 50 to 60Hz
- Efficacy: 140Lm/W
- Operating Temp: -4°F to 104°F
- IP Rating: IP20
- Power factor: >0.9
- DLC Listing: Premium
- Bluetooth: Enabled driver installed
- Sensor: BH4S 4 Pin Sensor
- Warranty: 50,000 hours and 5 years

LED Bluetooth Light Panel Fixture Details


Product Number	Size	Watts (Selectable)	CCT(K) (Selectable)	CRI	Efficacy (Lm /W)	Lumen Output Temperature (Lm)	Operating Temperature	IP Rating	DLC Product ID
IX-BLP-TWC22-30 BLE	2' x 2'	30	3000/3500/4000/5000	>80	125	3750/3780/3810/3840	-4°F to 104°F	IP20	TBA
IX-BLP-TWC24-40 BLE	2' x 4'	40	3000/3500/4000/5000	>80	125	2800/4200/5600	-4°F to 104°F	IP20	TBA



Distribution Diagram

IX-FPBL-14


20W

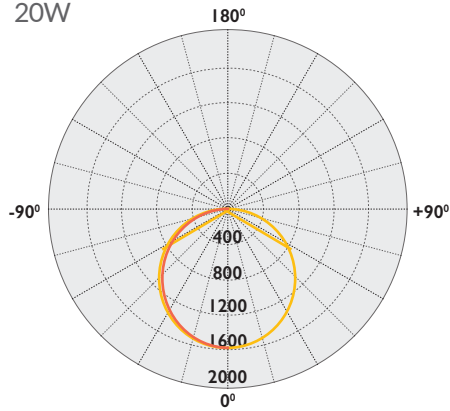

Average diffuser angle (50%) : 114.2°

— C0-180, 113.8
— C90-C270, 114.6


30W

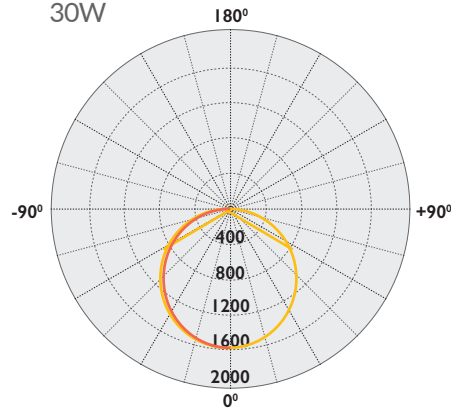

Average diffuser angle (50%) : 114.2°

— C0-180, 113.8
— C90-C270, 114.6

40W

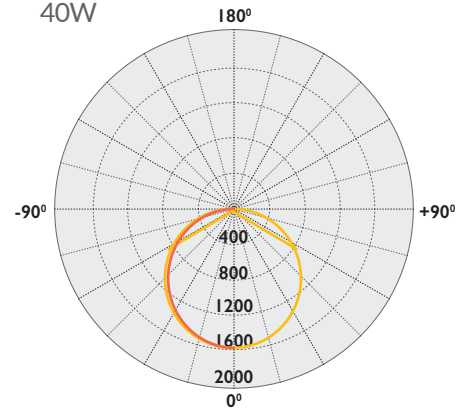


Average diffuser angle (50%) : 114.2°

— C0-180, 113.8
— C90-C270, 114.6

IX-FPBL-22


20W

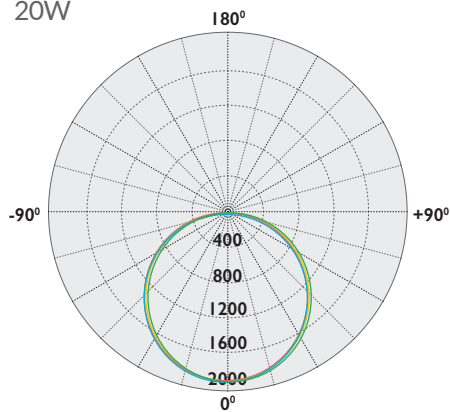

Average diffuser angle (50%) : 114.5°

— C0-180, 113.6
— C30-210, 113.3
— C60-240, 115.2
— C90-C270, 115.9


30W

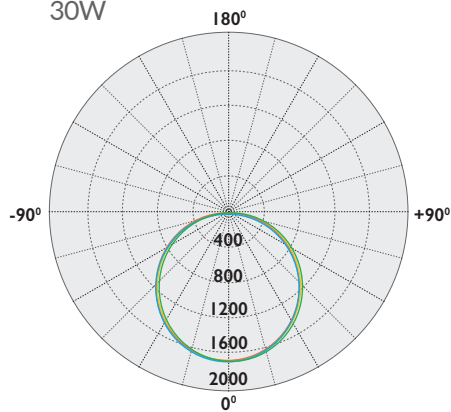

Average diffuser angle (50%) : 114.5°

— C0-180, 113.6
— C30-210, 113.3
— C60-240, 115.1
— C90-C270, 115.9

40W

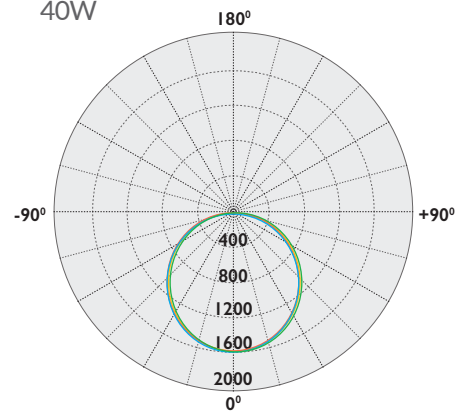


Average diffuser angle (50%) : 114°

— C0-180, 113.7
— C30-210, 113.4
— C60-240, 114.9
— C90-C270, 115.5

IX-FPBL-24


30W

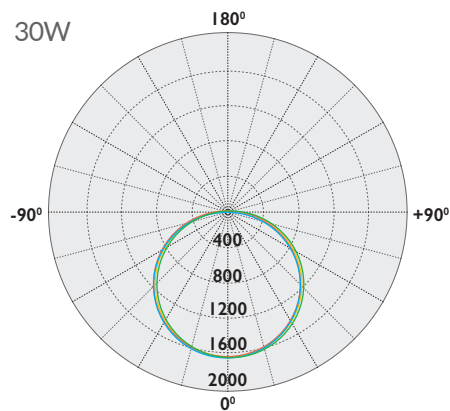

Average diffuser angle (50%) : 114.5°

— C0-180, 113.6
— C30-210, 113.3
— C60-240, 115.1
— C90-C270, 115.9


40W

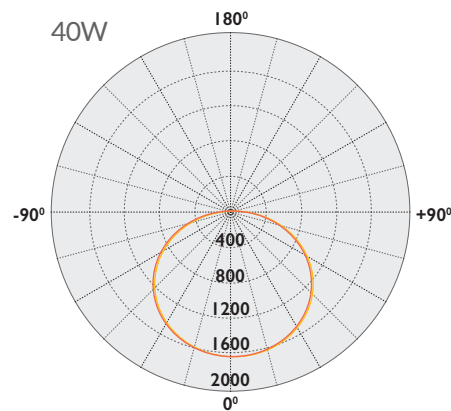

Average diffuser angle (50%) : 118.4°

— C0-180, 115.7
— C90-C270, 121.2

50W

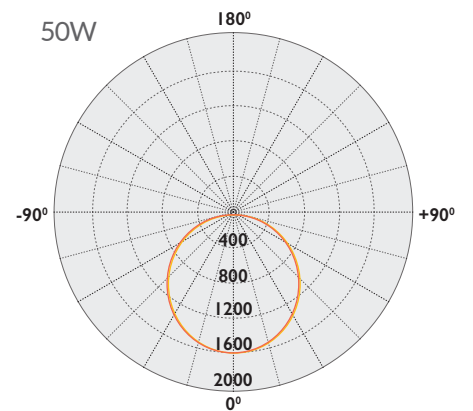

Average diffuser angle (50%) : 118.47°


— C0-180, 116.0
— C90-C270, 121.4

Product Dimensions


Mounting:

Fixture may be surface, pendant
Suitable for damp location


IX-BLE-14

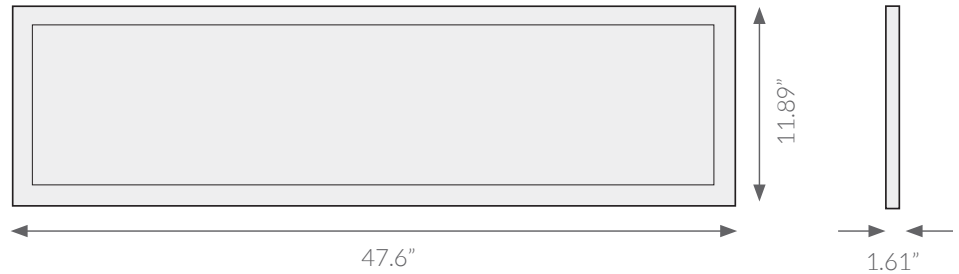

IX-BLE-22

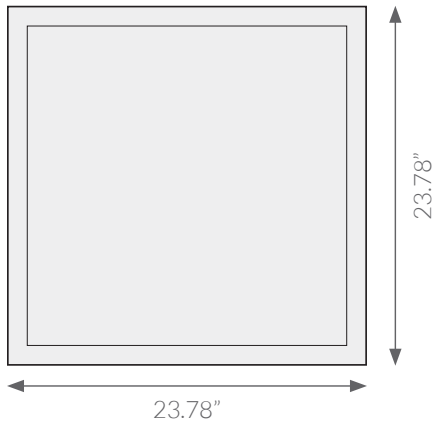

IX-BLE-24

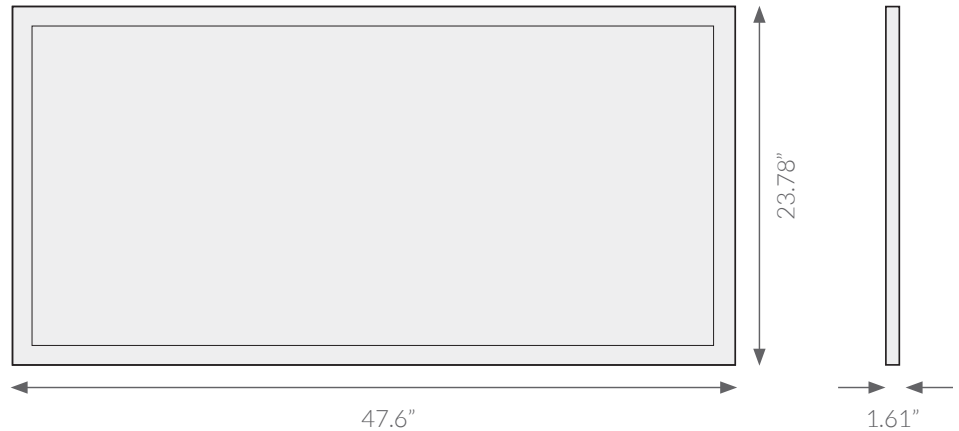

XONE READY VISTA. FUTUREPROOFING LIGHTING TECHNOLOGY

The new generation of Vista LED lighting is fitted with Bluetooth technology meaning you can operate from your cell phone, smart tablet or computer - on site or remotely.



Intertek

The ETL Listed mark is an indicator of the product's compliance with safety regulations, recognized and accepted by the UL and CSA marks. As Intertek's ETL subjects' products to UL standards for safety, products marked as ETL Listed meet the same rigorous criteria as marked with UL Lister or UL Recognized. Intertek ETL is a Nationally Recognized Testing Laboratory (NRTL) recognized by the Occupational Safety and Health Administration (OSHA).



The Federal Communications Commission (FCC) is an independent agency of the United States government that was created to regulate all forms of telecommunication inside of the U.S. including the radio frequency (RF) of electronics. Our products are fully tested ensure that they will not electromagnetically interfere with other products nor cause risk to the public as required by law.