



# LINEAR R

Architectural Recessed Slot Fixture

DIRECT SERIES LINEAR LIGHT

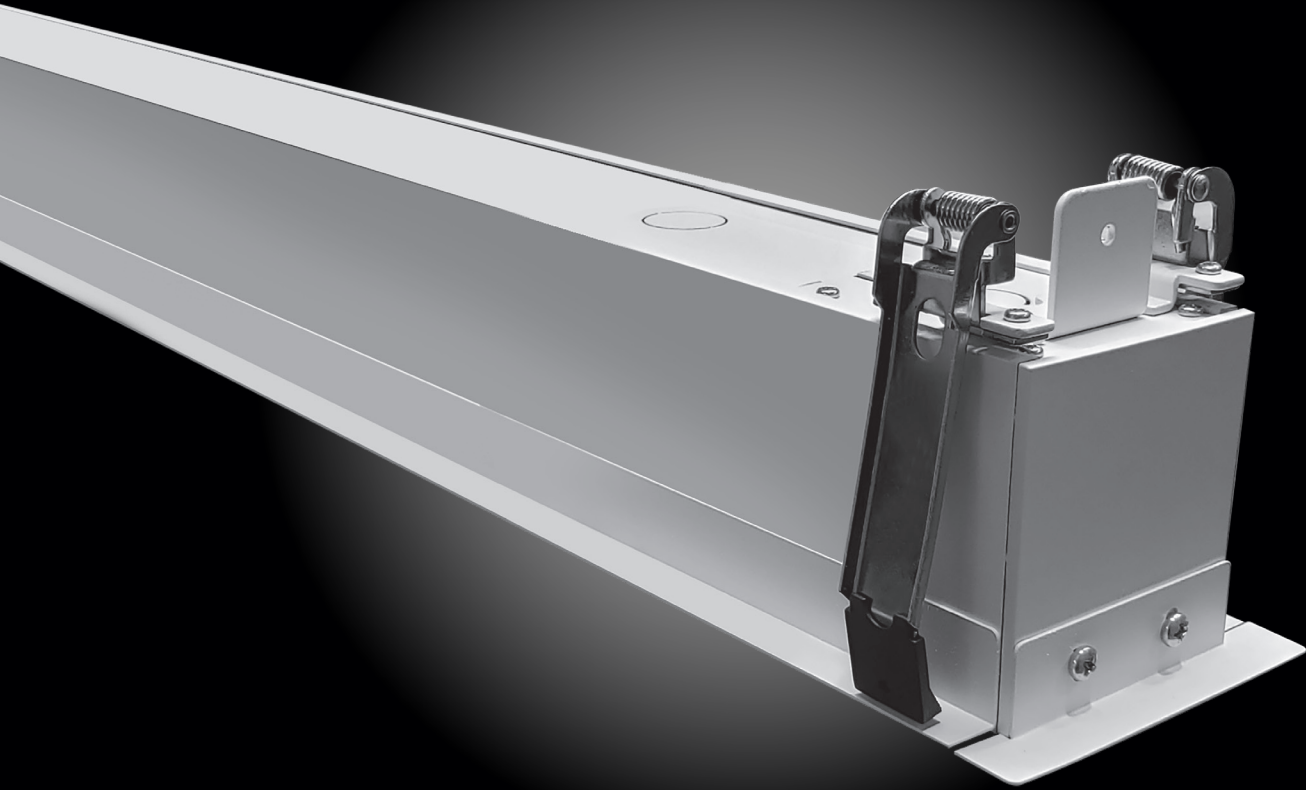

LUXURIO  
by INTRINSIX

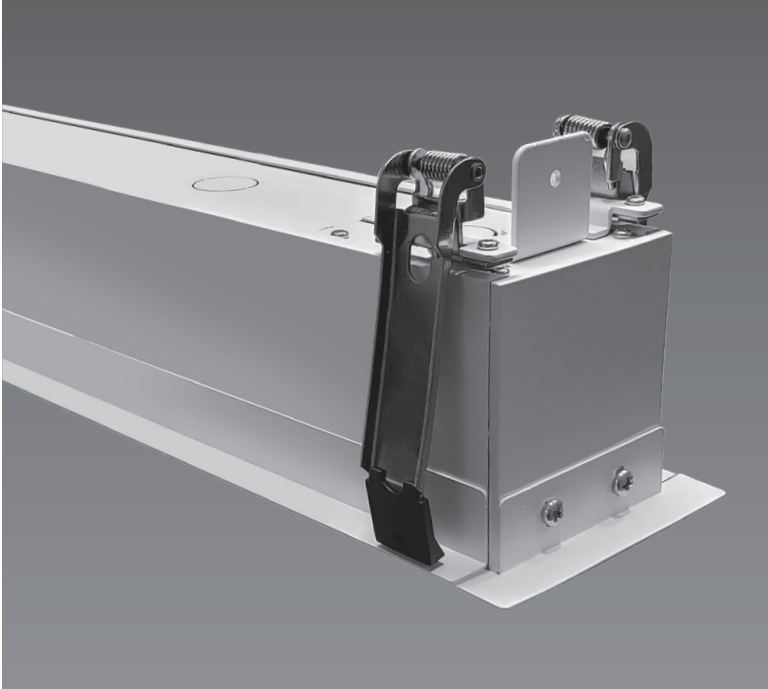

### Description

The IntrinsiX Linea R fixture is incredibly versatile and functional for office environments!

The option to adjust color temperature between 3,500K, 4,000K, and 5,000K is also a great feature, allowing for customization based on the desired ambiance or task lighting needs. And the slim design ensures it integrates well with modern office aesthetics without being obtrusive. Overall, it is a well-designed lighting solution for creating a comfortable and productive workspace.


### Specifications

- Voltage: 120V to 347V
- Dimming: 0-10V
- Efficacy: 130Lm/W
- Delivered Lumens: 2600-9100Lm
- CRI: >80
- DLC Listing: Premium
- Warranty: 50,000 hours/5 Years

### Product Details

Model Number	Product Length	Power (W)	CCT (K) Optional	Voltage (V) ETL	CRI	Lumen Output Temp (Lm)	Efficacy (Lm/W)	Dimming
L-RMASF04-40W-35/40/50LO-BK	4'	40	3500/4000/5000	120 to 347	>80	2600 to 9100	130	0 to 10
L-RMASF04-40W-35/40/50LO-WH	4'	40	3500/4000/5000	120 to 347	>80	2600 to 9100	130	0 to 10
L-RMASF08-70W-35/40/50LO-BK	8'	70	3500/4000/5000	120 to 347	>80	2600 to 9100	130	0 to 10
L-RMASF08-70W-35/40/50LO-WH	8'	70	3500/4000/5000	120 to 347	>80	2600 to 9100	130	0 to 10

### Mounting Kits & Accessories

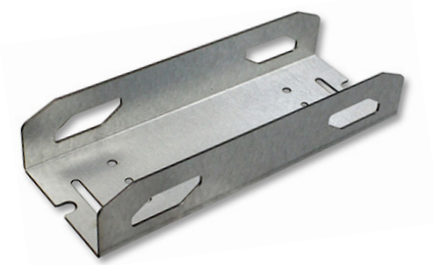

**Linkable Bracket**  
LASF-LB 4ft



**Recessed Mount Kits**




#### Power Cord

L-ASF-PC-Black	Black	8ft
L-ASF-PC-White	White	8ft



### STRIP FIXTURE DIMENSIONS:

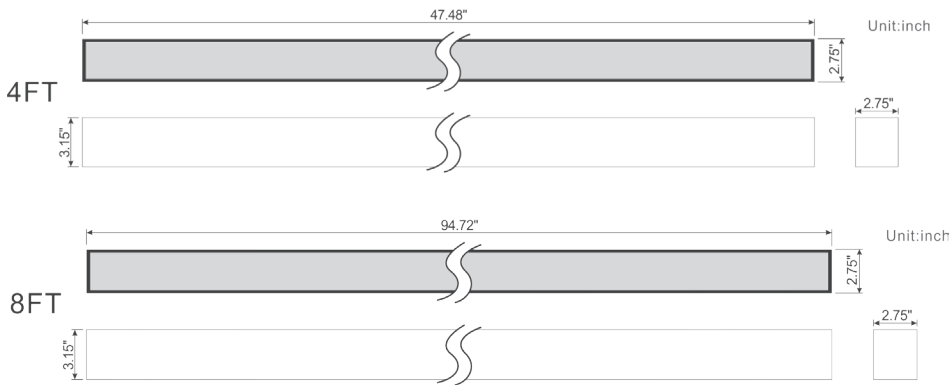

#### 4FT LWH:

47.48" × 2.75" × 3.15"  
(1206 × 70 × 80mm)

#### 8FT LWH:

94.72" × 2.75" × 3.15"  
(2406 × 70 × 80mm)

### SPECIFICATIONS:

Wattage	4FT 40W, 8FT 70W
Input Voltage	120-347V
Delivered Lumens	2600Lm~9100Lm
Efficacy	White -130Lm/W Black - 117Lm/W
CRI	>80
CCT	3500K, 4000K, 4500K, 5000K or 3500K / 4000K / 5000K Changeable
Technology	Bluetooth Mesh, 2.4G wireless, Motion Sensor, Emergency Backup (No ETL and DLC)
Certification	FCC, DLC Standard & ETL, Damp & Dry Location
Lens	PC Frosted 120
Pattern	Options L-Shape, T-Shape, X-Shape
Finish	Powder coating Matte Black, White
Installation	Recessed Mount
Dimming	Capacity 0-10V dimming ,ELV,DLI,TRIAC (Only 0-10 with ETL&DLC approved)
Packaging	1PC / Inner box, 4PCS / Carton (K838), 8FT 2PCS / carton (K838)

### PACKAGING:

Item	N.W.(Kg)	PCS/CTN	G.W./CTN	Carton Dimensions
4FT fixture	2.60 Kg	4	13.60Kg	1290 x 250 x 240mm
8FT fixture	5.13 Kg	2	12.7Kg	2460 x 115 x 110mm

### CERTIFICATION:

Item	LENGTH	FCC	ETL	DLC PREMIUM	K	Standard finish
L-RMASF04-40W-35/40/50LO-BK	4ft	√	√	√	35K/40K/45K changeable	Black
L-RMASF04-40W-35/40/50LO-WH	4ft	√	√	√	35K/40K/45K changeable	White
L-RMASF04-40W-35/40/50LO-BK	8ft	√	√	√	35K/40K/45K changeable	Black
L-RMASF04-40W-35/40/50LO-WH	8ft	√	√	√	35K/40K/45K changeable	White