


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:118.80V I:0.3460A P:40.900W PF:0.9960 Freq:50.00Hz Lamp Flux:5051.4x1 lm		
NAME: L-ASF120-40W	TYPE:White	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:1.2*0.07	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 123.51 lm/W			
MODEL	5000k	I _{max} (cd)	1838	S/MH(C0/180)	1.25
NOMINAL POWER(W)	40	LOR(%)	100.0	S/MH(C90/270)	1.20
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	5051.4	η UP, DN(C0-180)	0.0, 51.3
NOMINAL FLUX(lm)	5051.4	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.0, 48.7
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)		η down(%)	99.9	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

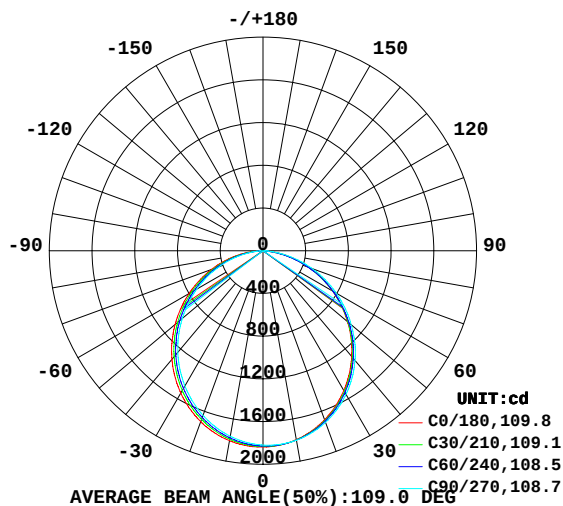

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

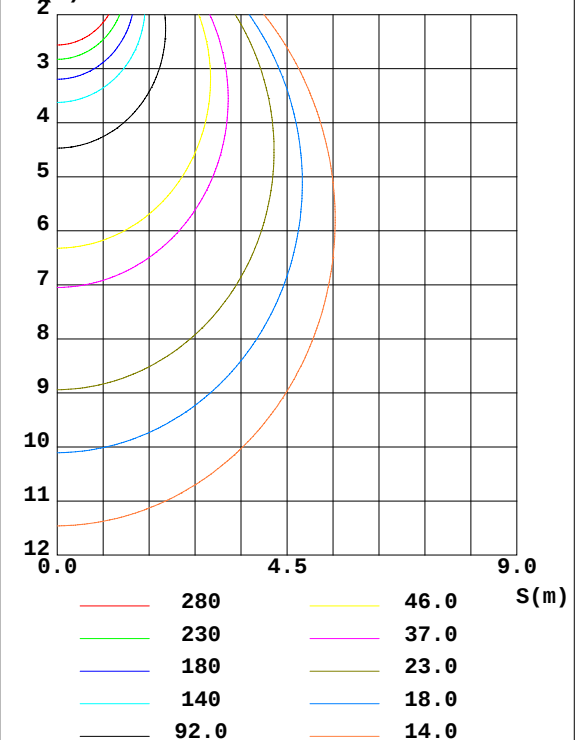

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-30

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
 Humidity:50.0%
 Test Distance:6.770m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1796	1800	1802	1804	1805	1785	1764	1757	0- 10	172.5	172.5	3.41, 3.41
20	1685	1696	1710	1720	1703	1672	1641	1631	10- 20	491.7	664.2	13.1, 13.1
30	1513	1529	1554	1570	1540	1500	1463	1451	20- 30	739.2	1403	27.8, 27.8
40	1292	1310	1341	1366	1328	1283	1241	1228	30- 40	882.6	2286	45.3, 45.3
50	1034	1046	1079	1118	1075	1030	985.8	973.1	40- 50	905.6	3192	63.2, 63.2
60	751.2	754.3	791.3	840.6	798.0	755.6	713.7	699.4	50- 60	808.5	4000	79.2, 79.2
70	460.0	452.2	490.0	549.1	513.4	474.7	435.0	419.0	60- 70	612.5	4613	91.3, 91.3
80	182.4	160.7	196.2	260.5	237.0	202.6	169.0	149.8	70- 80	350.7	4963	98.3, 98.3
90	0.2964	0.2944	0.2980	12.03	7.765	3.749	0.4704	0.4366	80- 90	84.02	5047	99.9, 99.9
100	0.3153	0.2895	0.2906	0.3001	0.3938	0.4075	0.4071	0.4039	90-100	0.5679	5048	99.9, 99.9
110	0.3803	0.3297	0.3403	0.3541	0.4129	0.4204	0.4109	0.4157	100-110	0.3852	5048	99.9, 99.9
120	0.4605	0.4281	0.4282	0.4243	0.4741	0.4845	0.5102	0.4998	110-120	0.4114	5049	99.9, 99.9
130	0.5866	0.5265	0.6024	0.6430	0.5811	0.5916	0.6420	0.6030	120-130	0.4776	5049	100, 100
140	0.6880	0.6298	0.9539	0.9116	0.6805	0.6967	0.9096	0.7043	130-140	0.5248	5050	100, 100
150	1.077	1.034	1.135	1.086	1.035	0.8976	1.028	0.9308	140-150	0.5293	5050	100, 100
160	1.244	1.256	1.626	1.267	1.241	1.256	1.481	1.319	150-160	0.5451	5051	100, 100
170	1.433	1.619	1.520	1.496	1.707	1.575	1.602	1.393	160-170	0.3989	5051	100, 100
180	1.416	1.430	1.470	1.411	1.420	1.431	1.470	1.412	170-180	0.1415	5051	100, 100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-08-30

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 γ Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
 Humidity: 50.0%
 Test Distance: 6.770m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:118.80V I:0.3460A P:40.900W PF:0.9960 Freq:50.00Hz Lamp Flux:5051.4x1 lm		
NAME: L-ASF120-40W	TYPE:White	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:1.2*0.07	Shielding Angle:

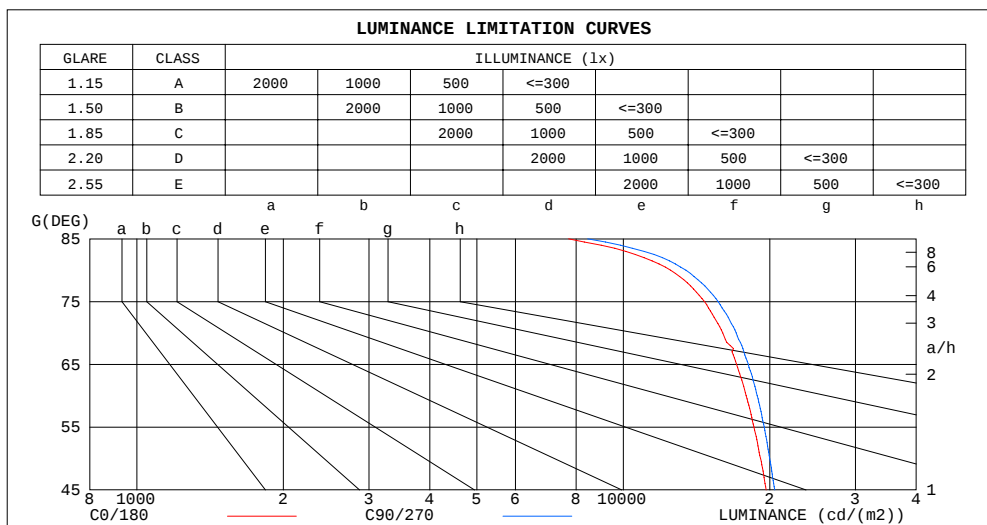

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	7716	8449
80	12507	13453
75	14687	15666
70	16010	17056
65	17087	18069
60	17885	18840
55	18554	19485
50	19141	19993
45	19665	20474


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-08-30

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:6.770m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:118.80V I:0.3460A P:40.900W PF:0.9960 Freq:50.00Hz Lamp Flux:5051.4x1 lm		
NAME: L-ASF120-40W	TYPE:White	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:1.2*0.07	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

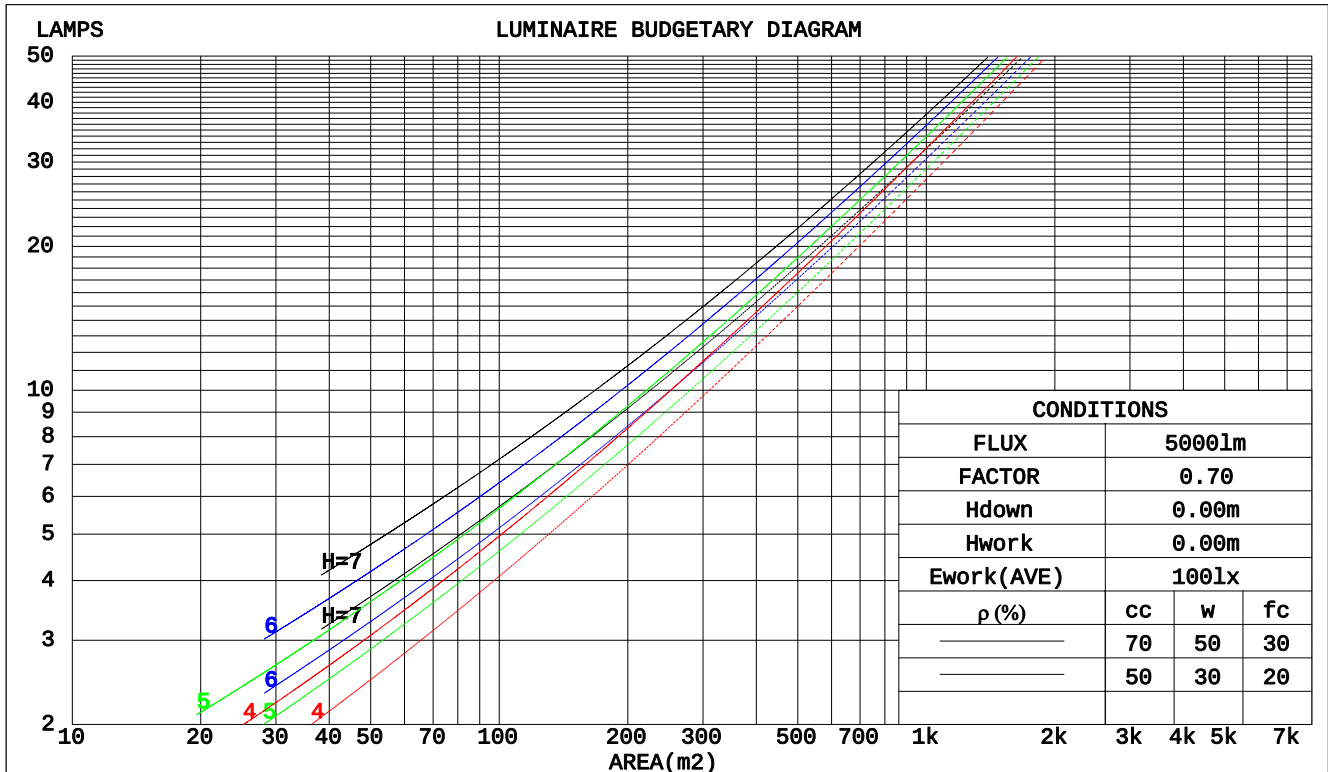

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-08-30

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:6.770m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:118.80V I:0.3460A P:40.900W PF:0.9960 Freq:50.00Hz Lamp Flux:5051.4x1 lm									
NAME: L-ASF120-40W					TYPE:White			WEIGHT:	
SPEC.:					DIM.:			SERIAL No.:	
MFR.: Shenzhen Wisdom Light Co., ltd					SUR.:1.2*0.07			Shielding Angle:	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.306	.174	.055	.299	.171	.054	.286	.164	.052	.274	.158	.051	.262	.152	.049	
2.0	.289	.158	.049	.283	.156	.048	.271	.151	.047	.260	.146	.046	.250	.142	.045	
3.0	.268	.143	.043	.263	.141	.042	.252	.137	.042	.243	.133	.041	.234	.129	.040	
4.0	.248	.129	.038	.243	.127	.038	.234	.124	.037	.225	.121	.036	.217	.118	.036	
5.0	.229	.117	.034	.225	.115	.034	.217	.113	.033	.209	.110	.033	.202	.108	.032	
6.0	.213	.107	.030	.209	.105	.030	.201	.103	.030	.195	.101	.030	.188	.099	.029	
7.0	.198	.098	.028	.194	.097	.028	.188	.095	.027	.182	.093	.027	.176	.092	.027	
8.0	.185	.090	.025	.182	.090	.025	.176	.088	.025	.171	.086	.025	.165	.085	.025	
9.0	.173	.084	.023	.171	.083	.023	.165	.082	.023	.160	.080	.023	.156	.079	.023	
10.0	.163	.078	.022	.161	.078	.022	.156	.076	.022	.151	.075	.021	.147	.074	.021	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.181	.157	.135	.155	.135	.116	.106	.093	.081	.061	.054	.047	.019	.017	.015	
2.0	.173	.133	.099	.148	.114	.086	.101	.079	.060	.058	.046	.035	.019	.015	.011	
3.0	.165	.115	.075	.141	.099	.065	.097	.069	.046	.056	.040	.027	.018	.013	.009	
4.0	.157	.102	.059	.135	.088	.051	.093	.061	.036	.054	.036	.021	.017	.012	.007	
5.0	.150	.091	.048	.129	.079	.042	.089	.055	.029	.051	.032	.017	.017	.011	.006	
6.0	.143	.083	.040	.122	.072	.035	.084	.050	.025	.049	.030	.015	.016	.010	.005	
7.0	.136	.076	.034	.117	.066	.030	.081	.046	.021	.047	.027	.012	.015	.009	.004	
8.0	.129	.070	.029	.111	.061	.026	.077	.043	.018	.045	.025	.011	.014	.008	.004	
9.0	.123	.065	.026	.106	.057	.023	.074	.040	.016	.043	.023	.010	.014	.008	.003	
10.0	.118	.061	.023	.101	.053	.020	.070	.037	.014	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-30

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
 Humidity:50.0%
 Test Distance:6.770m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:118.80V I:0.3460A P:40.900W PF:0.9960 Freq:50.00Hz Lamp Flux:5051.4x1 lm											
NAME: L-ASF120-40W					TYPE:White			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.: Shenzhen Wisdom Light Co., ltd					SUR.:1.2*0.07			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.0	24.5	23.2	24.7	24.9	23.1	24.6	23.4	24.8	25.1	
	3H	24.4	25.8	24.7	26.0	26.3	24.6	26.0	24.9	26.2	26.5
	4H	25.0	26.3	25.3	26.6	26.8	25.2	26.5	25.5	26.8	27.0
	6H	25.3	26.6	25.7	26.9	27.1	25.6	26.8	25.9	27.1	27.4
	8H	25.4	26.6	25.8	26.9	27.2	25.7	26.9	26.0	27.2	27.5
	12H	25.5	26.6	25.8	26.9	27.2	25.7	26.9	26.1	27.2	27.5
4H	2H	23.5	24.9	23.9	25.1	25.4	23.7	25.0	24.0	25.3	25.5
	3H	25.2	26.3	25.5	26.6	26.9	25.3	26.5	25.7	26.8	27.1
	4H	25.8	26.9	26.2	27.2	27.6	26.0	27.1	26.4	27.4	27.7
	6H	26.3	27.3	26.7	27.6	28.0	26.5	27.4	26.9	27.8	28.1
	8H	26.4	27.3	26.9	27.7	28.1	26.6	27.5	27.0	27.9	28.3
	12H	26.5	27.3	26.9	27.7	28.1	26.7	27.5	27.1	27.9	28.3
8H	4H	26.1	26.9	26.5	27.3	27.7	26.2	27.1	26.6	27.4	27.8
	6H	26.6	27.4	27.1	27.8	28.2	26.8	27.5	27.2	27.9	28.3
	8H	26.8	27.5	27.3	27.9	28.4	27.0	27.6	27.4	28.0	28.5
	12H	26.9	27.5	27.4	27.9	28.4	27.0	27.6	27.5	28.1	28.5
12H	4H	26.1	26.9	26.5	27.2	27.7	26.2	27.0	26.6	27.4	27.8
	6H	26.7	27.3	27.1	27.7	28.2	26.8	27.4	27.3	27.9	28.3
	8H	26.9	27.4	27.3	27.9	28.3	27.0	27.6	27.5	28.0	28.5
Variations with the observer position at spacings:											
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2					
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					
2.0H	+ 0.2 / - 0.3					+ 0.3 / - 0.3					

CIE Pub.117, 5051 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 5.6$)
Area: 0.084 m²

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-08-30

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:6.770m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:118.80V I:0.3460A P:40.900W PF:0.9960 Freq:50.00Hz Lamp Flux:5051.4x1 lm		
NAME: L-ASF120-40W	TYPE:White	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:1.2*0.07	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	58	46	39	57	46	39	56	46	39	33
0.80	68	56	49	67	56	49	65	55	48	42
1.00	76	65	58	75	65	58	73	66	57	50
1.25	83	73	66	82	72	65	79	71	65	57
1.50	88	79	72	87	78	71	84	76	70	63
2.00	95	87	80	93	85	80	90	83	78	70
2.50	99	91	85	97	90	84	93	87	83	74
3.00	102	96	90	100	94	89	96	91	87	78
4.00	106	101	96	104	99	95	100	96	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-30

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
 Humidity:50.0%
 Test Distance:6.770m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:118.80V I:0.3460A P:40.900W PF:0.9960 Freq:50.00Hz Lamp Flux:5051.4x1 lm		
NAME: L-ASF120-40W	TYPE:White	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:1.2*0.07	Shielding Angle:

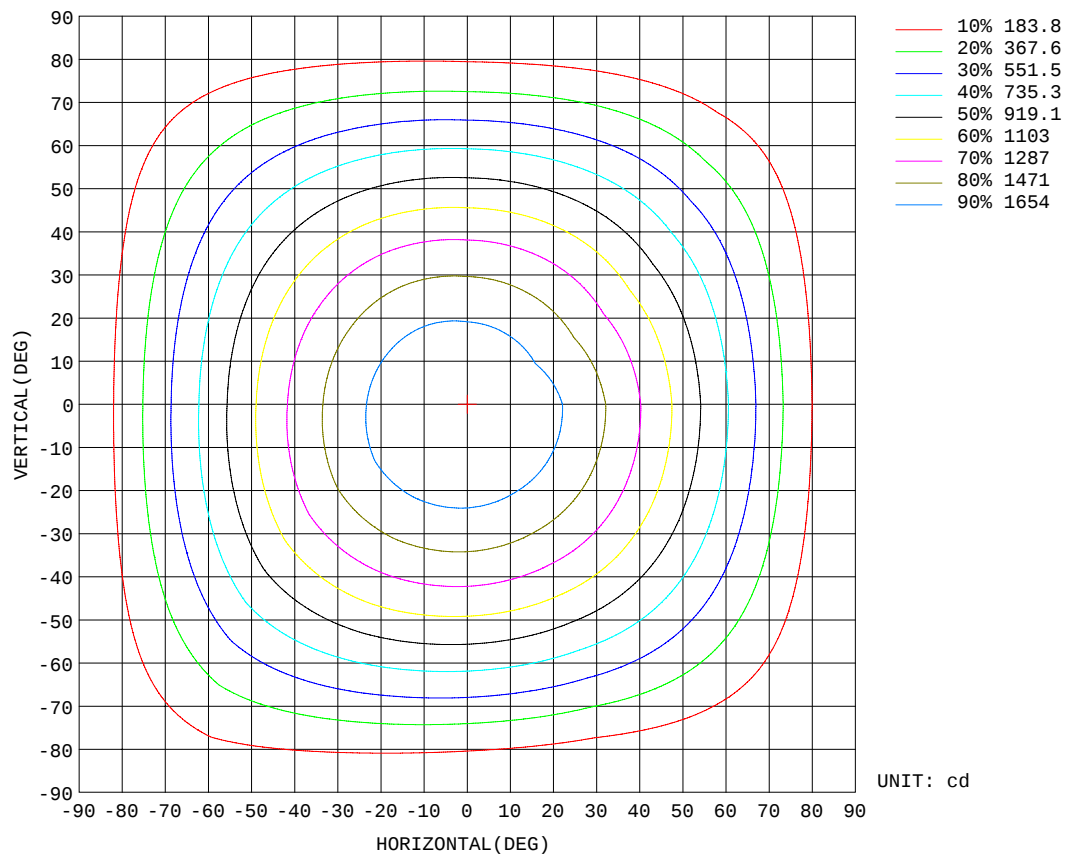


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-08-30

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:6.770m [K=1.0000]
Remarks:

AAI CURVES

Test:U:118.80V I:0.3460A P:40.900W PF:0.9960 Freq:50.00Hz Lamp Flux:5051.4x1 lm		
NAME: L-ASF120-40W	TYPE:White	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:1.2*0.07	Shielding Angle:

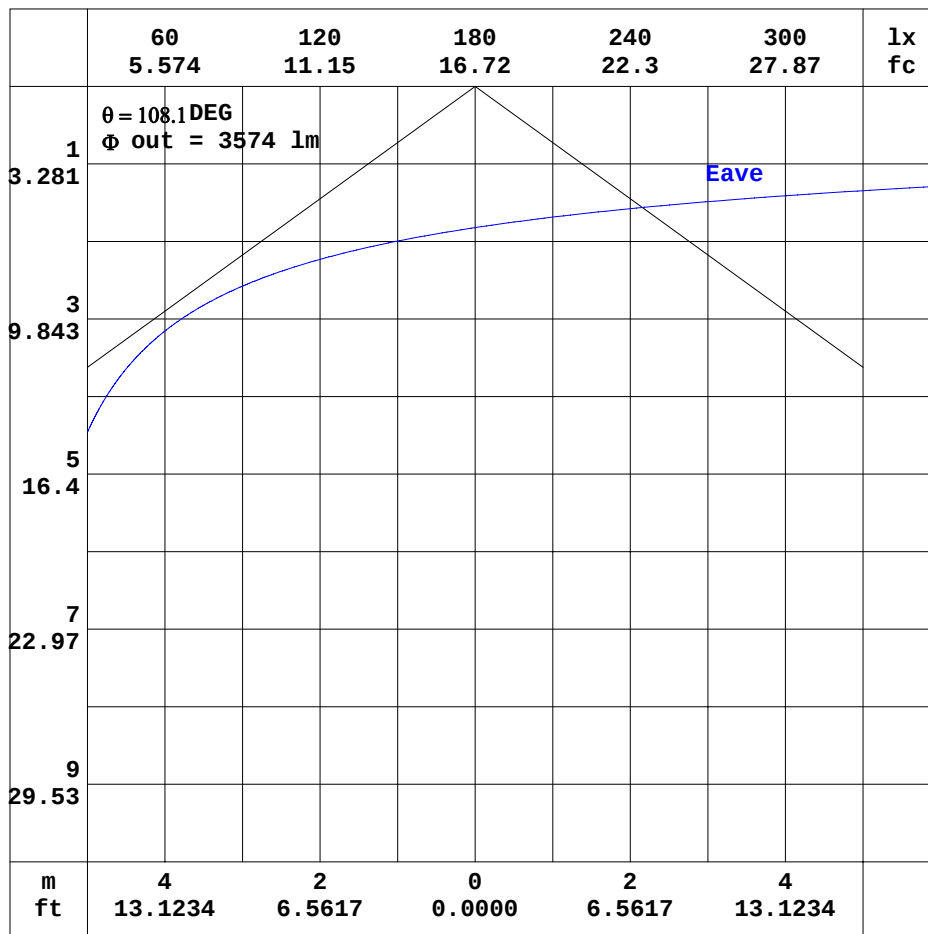


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-08-30

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
 Humidity: 50.0%
 Test Distance: 6.770m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:118.80V I:0.3460A P:40.900W PF:0.9960 Freq:50.00Hz Lamp Flux:5051.4x1 lm		
NAME: L-ASF120-40W	TYPE:White	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:1.2*0.07	Shielding Angle:

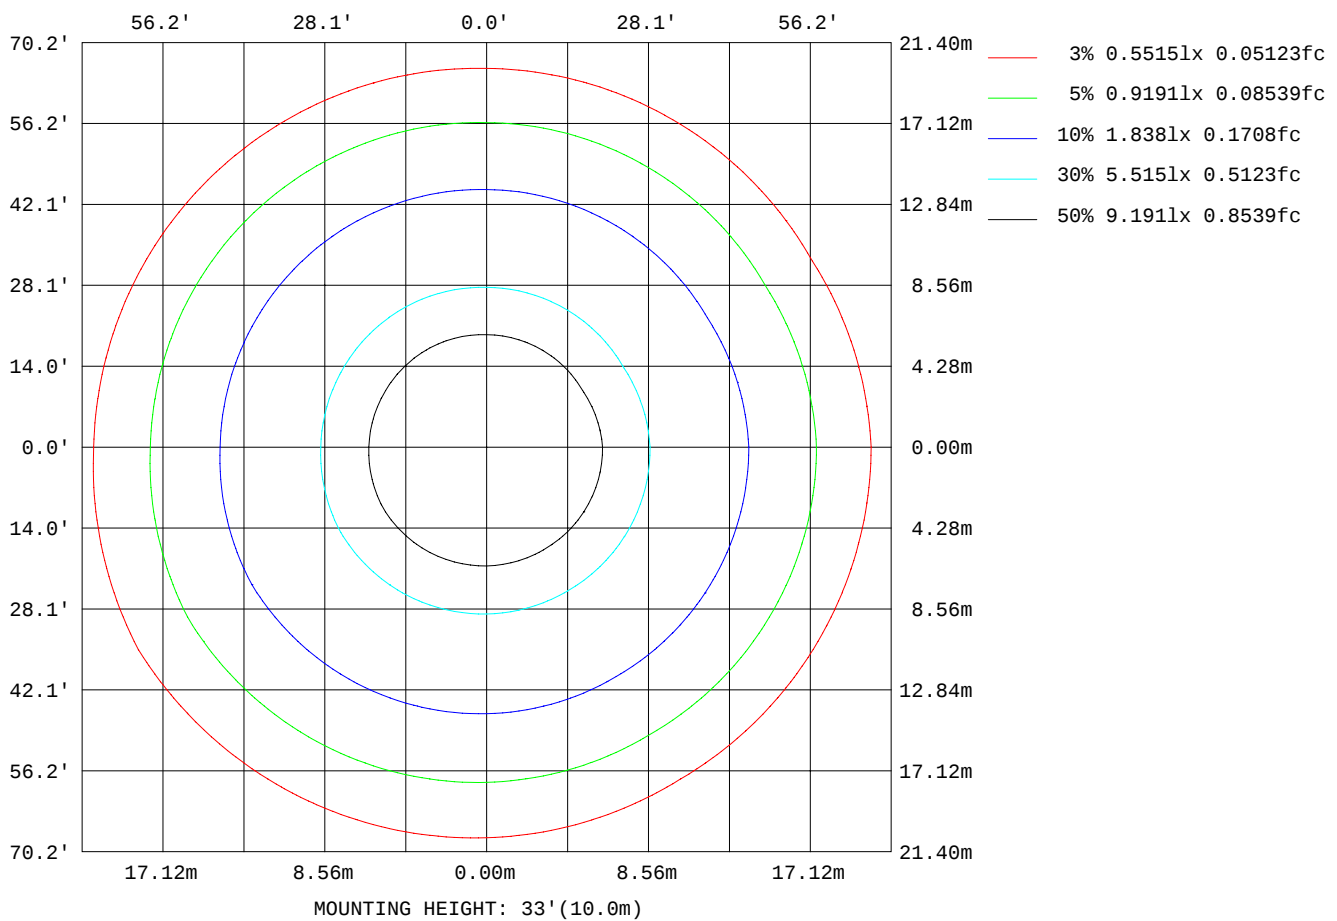

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-08-30

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity:50.0%
Test Distance:6.770m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:118.80V I:0.3460A P:40.900W PF:0.9960 Freq:50.00Hz Lamp Flux:5051.4x1 lm		
NAME: L-ASF120-40W	TYPE:White	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Wisdom Light Co., ltd	SUR.:1.2*0.07	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	17780
L_0~180(75)av	15930
L_0~180(85)av	10898
L_90~270(65)av	17138
L_90~270(75)av	14726
L_90~270(85)av	7758
L_45(65)av	17435
L_45(75)av	15249
L_45(85)av	8710

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-30

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
 Humidity:50.0%
 Test Distance:6.770m [K=1.0000]
 Remarks:

Planar Illuminance Curve

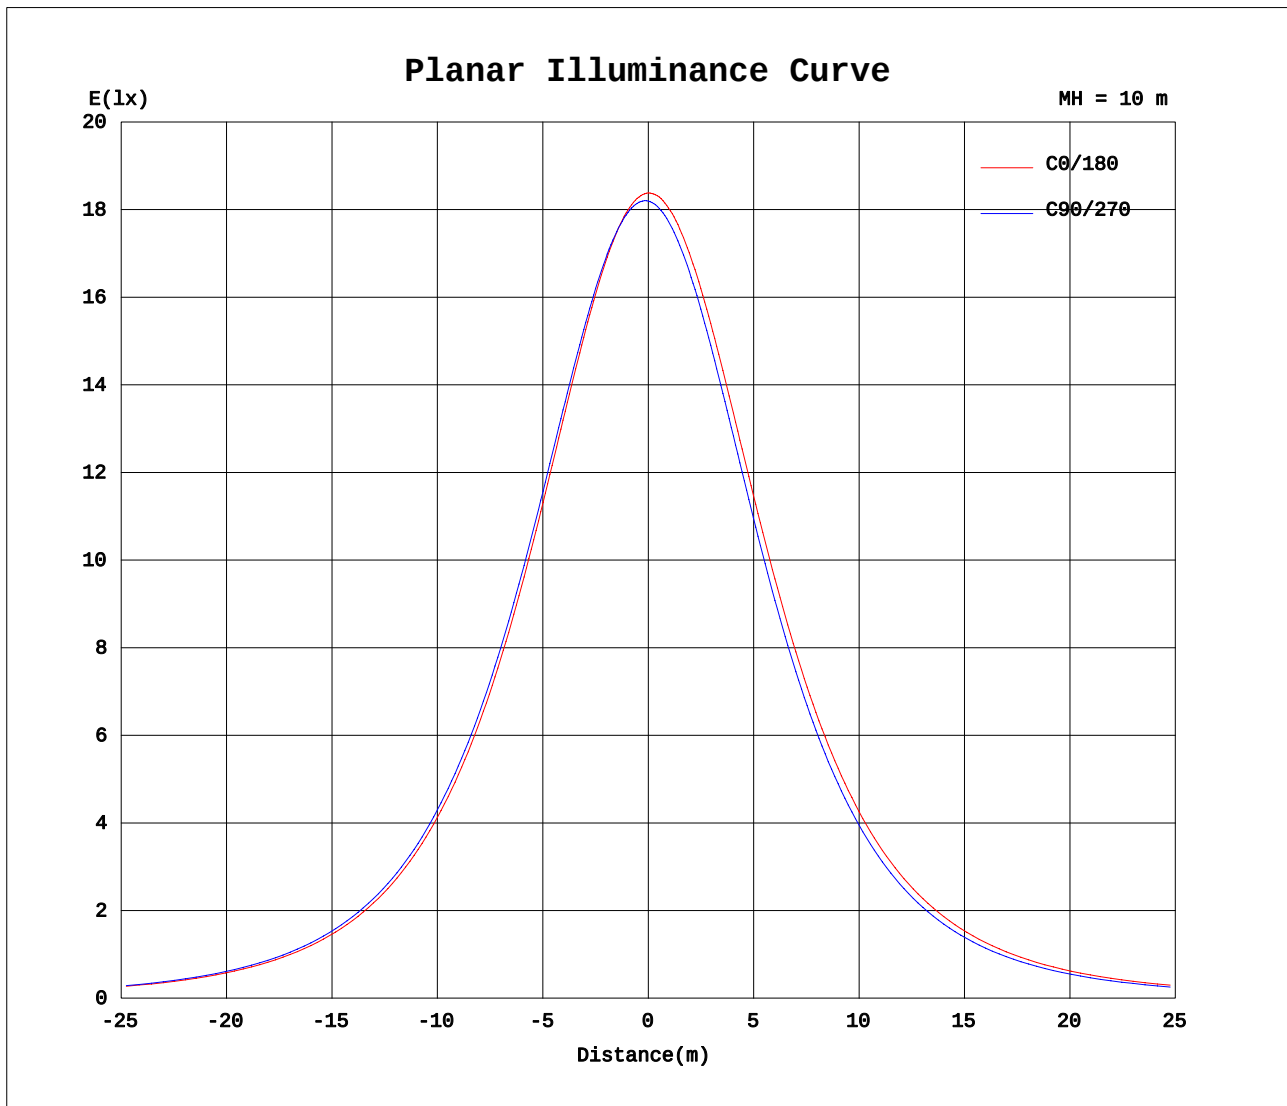

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-08-30

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
Humidity: 50.0%
Test Distance: 6.770m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:118.80V I:0.3460A P:40.900W PF:0.9960 Freq:50.00Hz Lamp Flux:5051.4x1 lm																	
NAME: L-ASF120-40W									TYPE:White						WEIGHT:		
SPEC.:									DIM.:						SERIAL No.:		
MFR.: Shenzhen Wisdom Light Co., ltd									SUR.:1.2*0.07						Shielding Angle:		

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1838	1833	1828	1820	1818	1815	1838	1833	1828	1820	1818	1815						
5	1826	1826	1824	1820	1820	1819	1831	1821	1814	1801	1797	1794						
10	1796	1799	1801	1802	1804	1804	1805	1791	1780	1764	1759	1755						
15	1749	1755	1759	1764	1770	1772	1764	1745	1729	1710	1703	1700						
20	1685	1693	1699	1710	1719	1721	1703	1681	1662	1641	1633	1629						
25	1606	1616	1624	1640	1650	1654	1628	1603	1582	1558	1549	1545						
30	1513	1524	1535	1554	1568	1572	1540	1512	1489	1463	1454	1448						
35	1408	1419	1432	1453	1472	1478	1438	1408	1384	1356	1348	1340						
40	1292	1304	1316	1341	1361	1371	1328	1295	1272	1241	1233	1224						
45	1168	1176	1190	1216	1240	1254	1205	1174	1147	1117	1108	1100						
50	1034	1040	1052	1079	1110	1126	1075	1043	1017	986	976	970						
55	894	898	906	939	970	994	938	909	880	851	840	835						
60	751	752	756	791	825	856	798	770	741	714	703	696						
65	607	604	605	641	679	715	656	630	601	575	564	555						
70	460	454	450	490	529	569	513	487	463	435	426	412						
75	319	307	301	341	382	424	373	348	327	300	291	274						
80	182	165	156	196	239	282	237	213	192	169	159	141						
85	56.5	35.2	29.3	61.9	105	144	103	80.7	65.0	51.7	37.3	18.3						
90	0.30	0.29	0.30	0.30	8.36	15.7	7.76	4.02	3.48	0.47	0.46	0.41						
95	0.29	0.28	0.28	0.28	0.29	0.30	0.40	0.42	0.43	0.42	0.41	0.41						
100	0.32	0.29	0.29	0.29	0.29	0.31	0.39	0.40	0.41	0.41	0.40	0.40						
105	0.34	0.32	0.30	0.31	0.31	0.33	0.40	0.41	0.41	0.41	0.40	0.41						
110	0.38	0.33	0.33	0.34	0.34	0.37	0.41	0.42	0.42	0.41	0.41	0.42						
115	0.40	0.37	0.36	0.37	0.37	0.39	0.44	0.44	0.44	0.44	0.44	0.45						
120	0.46	0.45	0.41	0.43	0.41	0.44	0.47	0.48	0.49	0.51	0.49	0.51						
125	0.54	0.50	0.46	0.48	0.65	0.50	0.53	0.53	0.55	0.57	0.63	0.57						
130	0.59	0.55	0.50	0.60	0.74	0.54	0.58	0.58	0.60	0.64	0.60	0.61						
135	0.64	0.60	0.56	0.86	0.85	0.68	0.63	0.64	0.66	0.78	0.65	0.66						
140	0.69	0.65	0.61	0.95	0.94	0.88	0.68	0.69	0.70	0.91	0.70	0.71						
145	0.80	0.70	0.73	1.03	1.03	0.97	0.73	0.73	0.76	0.98	0.74	0.75						
150	1.08	0.90	1.17	1.14	1.12	1.05	1.03	0.80	0.99	1.03	1.07	0.79						
155	1.15	1.19	1.22	1.32	1.20	1.14	1.17	1.14	1.15	1.16	1.19	1.44						
160	1.24	1.25	1.26	1.63	1.30	1.24	1.24	1.25	1.26	1.48	1.27	1.37						
165	1.43	1.38	1.51	1.44	1.39	1.69	1.32	1.29	1.40	1.47	1.34	1.38						
170	1.43	1.75	1.48	1.52	1.47	1.52	1.71	1.61	1.54	1.60	1.39	1.40						
175	1.44	1.49	1.47	1.50	1.47	1.47	1.44	1.42	1.40	1.42	1.39	1.38						
180	1.42	1.42	1.44	1.47	1.42	1.40	1.42	1.42	1.44	1.47	1.42	1.40						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-30

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.407.13
 Humidity:50.0%
 Test Distance:6.770m [K=1.0000]
 Remarks: