


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:118.1V I:0.3420A P:40.20W PF:0.9940 Lamp Flux:5426.94x1 lm		
NAME: LED LINEAR LIGHT	TYPE:down light	WEIGHT:
DIM.: 4FT	SPEC.:3500K White	SERIAL No.:
MFR.: YQ	SUR.:0.07*1.2m	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 135.00 lm/W			
MODEL		I _{max} (cd)	1962	S/MH(C0/180)	1.24
NOMINAL POWER(W)	40	LOR(%)	100.0	S/MH(C90/270)	1.26
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	5426.9	η UP, DN(C0-180)	1.0, 51.3
NOMINAL FLUX(lm)	5426.94	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.0, 46.7
LAMPS INSIDE	1	η up(%)	1.9	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	118.3	η down(%)	98.1	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

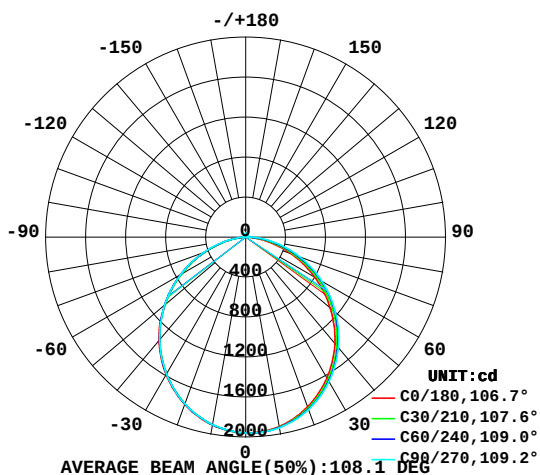

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

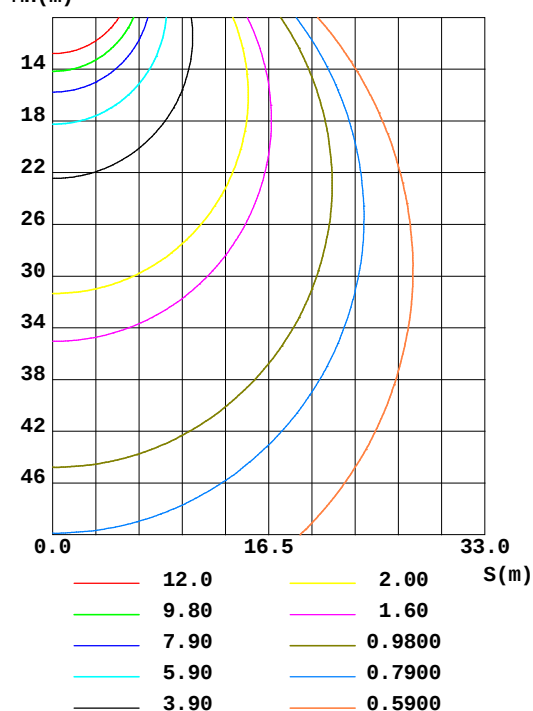


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2021-07-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM AND LUMINANCE LIMITATION CURVES

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	ϕ zone	ϕ total	%lum, lamp
10	1924	1933	1937	1931	1910	1906	1905	1908	0- 10	185.2	185.2	3.41, 3.41
20	1807	1827	1836	1824	1782	1777	1776	1781	10- 20	527.3	712.4	13.1, 13.1
30	1626	1654	1668	1650	1589	1583	1584	1589	20- 30	791.1	1504	27.7, 27.7
40	1390	1425	1442	1422	1350	1340	1340	1346	30- 40	941.7	2445	45.1, 45.1
50	1105	1152	1173	1149	1060	1056	1058	1062	40- 50	961.7	3497	62.8, 62.8
60	794.7	850.3	878.3	848.5	749.1	745.7	751.7	750.8	50- 60	851.0	4258	78.5, 78.5
70	475.2	535.6	573.0	535.9	435.0	428.1	439.6	431.7	60- 70	633.0	4891	90.1, 90.1
80	177.3	233.9	278.0	236.1	143.5	136.9	153.9	136.8	70- 80	349.3	5240	96.6, 96.6
90	5.848	9.854	24.24	9.955	3.106	3.411	3.880	4.764	80- 90	81.12	5321	98.1, 98.1
100	6.838	6.805	6.694	6.092	5.908	6.840	7.986	7.602	90-100	5.928	5327	98.2, 98.2
110	10.82	11.00	11.88	10.59	10.23	11.22	13.16	11.82	100-110	9.487	5337	98.3, 98.3
120	15.51	15.64	17.36	15.48	15.04	15.81	18.40	16.24	110-120	13.55	5350	98.6, 98.6
130	19.95	19.92	22.30	19.96	19.42	20.04	22.98	20.35	120-130	16.37	5367	98.9, 98.9
140	23.67	23.71	26.30	23.97	23.03	23.87	26.84	24.25	130-140	17.30	5384	99.2, 99.2
150	26.75	27.36	29.46	27.67	26.15	27.65	30.13	28.26	140-150	16.34	5400	99.5, 99.5
160	30.11	31.31	32.50	31.49	30.14	31.55	33.53	32.17	150-160	13.70	5414	99.8, 99.8
170	34.69	34.92	35.85	35.20	35.43	35.28	36.55	35.68	160-170	9.445	5423	99.9, 99.9
180	38.77	37.37	38.19	37.67	38.81	37.37	38.16	37.65	170-180	3.480	5427	100, 100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

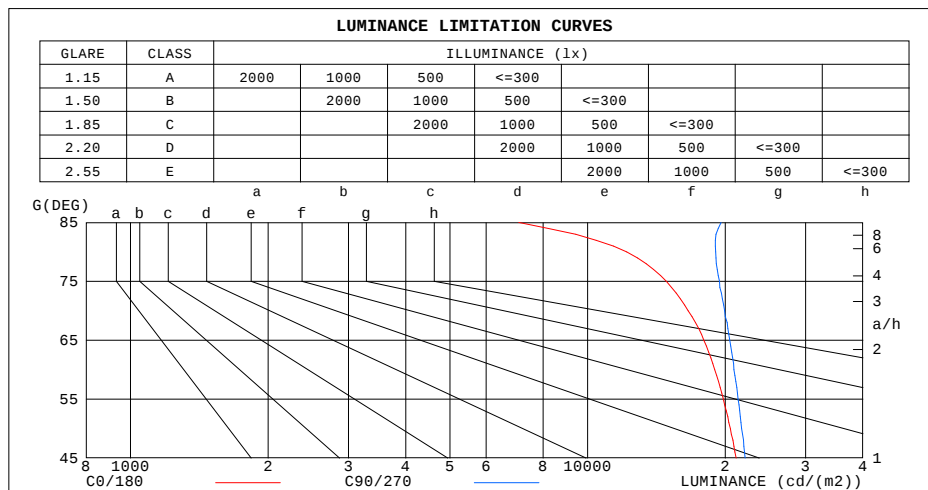

LUMINANCE cd/(m2)		
G(°)	C0/180	C90/270
85	7076	19606
80	12186	19064
75	14877	19432
70	16584	19948
65	17971	20457
60	18969	20916
55	19812	21359
50	20522	21720
45	21131	22114


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2021-07-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:118.1V I:0.3420A P:40.20W PF:0.9940 Lamp Flux:5426.94x1 lm		
NAME: LED LINEAR LIGHT	TYPE:down light	WEIGHT:
DIM.: 4FT	SPEC.:3500K White	SERIAL No.:
MFR.: YQ	SUR.:0.07*1.2m	PROTECTION ANGLE:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.00	1.00	1.00	.98
1.0	1.04	.90	.96	1.01	.98	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.91	.84	.78	.89	.82	.77	.85	.80	.75	.81	.77	.73	.78	.74	.71	.69
3.0	.80	.72	.65	.78	.71	.64	.75	.68	.63	.72	.66	.62	.69	.64	.60	.58
4.0	.71	.62	.55	.69	.61	.55	.66	.59	.54	.64	.58	.53	.62	.56	.52	.50
5.0	.63	.54	.48	.62	.54	.47	.60	.52	.47	.57	.51	.46	.55	.50	.45	.43
6.0	.57	.48	.42	.56	.47	.41	.54	.46	.41	.52	.45	.40	.50	.44	.40	.38
7.0	.52	.43	.37	.51	.42	.37	.49	.42	.36	.47	.41	.36	.46	.40	.35	.33
8.0	.47	.39	.33	.46	.38	.33	.45	.38	.32	.43	.37	.32	.42	.36	.32	.30
9.0	.43	.35	.30	.43	.35	.29	.41	.34	.29	.40	.34	.29	.39	.33	.29	.27
10.0	.40	.32	.27	.39	.32	.27	.38	.31	.26	.37	.31	.26	.36	.30	.26	.24

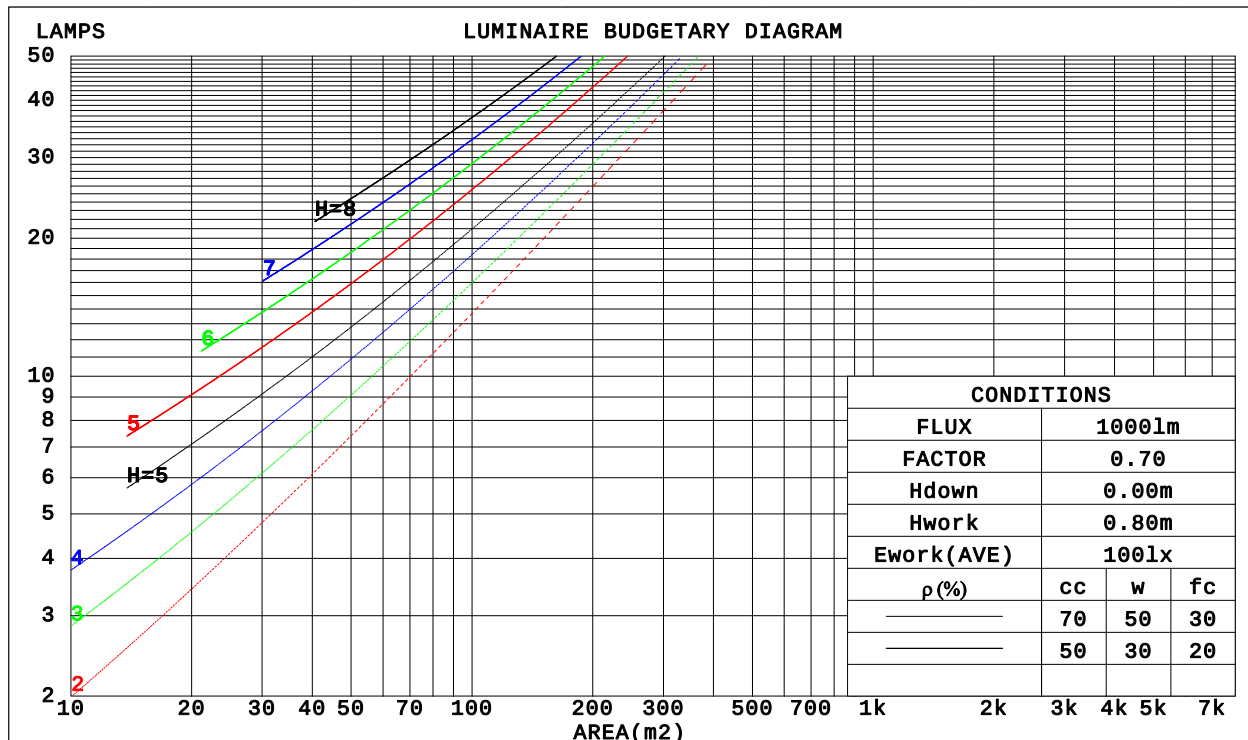

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 26.3DEG
 Operators: Ethan
 Test Date: 2021-07-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity: 36%
 Test Distance: 6.770m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:118.1V I:0.3420A P:40.20W PF:0.9940 Lamp Flux:5426.94x1 lm					
NAME: LED LINEAR LIGHT			TYPE:down light		WEIGHT:
DIM.: 4FT			SPEC.:3500K White		SERIAL No.:
MFR.: YQ			SUR.:0.07*1.2m		PROTECTION ANGLE:

ρ_{cc}	80%			70%			50%			30%			10%			0	
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ_{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.301	.171	.054	.294	.167	.053	.279	.160	.051	.266	.153	.049	.254	.147	.047		
2.0	.285	.156	.048	.278	.153	.047	.266	.148	.046	.254	.143	.045	.243	.138	.043		
3.0	.265	.141	.042	.259	.139	.042	.248	.134	.041	.237	.130	.040	.227	.126	.039		
4.0	.245	.127	.037	.240	.125	.037	.230	.122	.036	.220	.118	.036	.212	.115	.035		
5.0	.227	.116	.033	.222	.114	.033	.213	.111	.033	.205	.108	.032	.197	.105	.032		
6.0	.211	.106	.030	.206	.104	.030	.198	.102	.030	.191	.099	.029	.184	.097	.029		
7.0	.196	.097	.028	.193	.096	.027	.185	.094	.027	.179	.092	.027	.172	.090	.026		
8.0	.184	.090	.025	.180	.089	.025	.174	.087	.025	.168	.085	.024	.162	.083	.024		
9.0	.172	.083	.023	.169	.082	.023	.163	.081	.023	.158	.079	.023	.153	.078	.022		
10.0	.162	.078	.022	.159	.077	.021	.154	.075	.021	.149	.074	.021	.144	.073	.021		

ρ_{cc}	80%			70%			50%			30%			10%			0	
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ_{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)										
0.0	.205	.205	.205	.175	.175	.175	.120	.120	.120	.069	.069	.069	.022	.022	.022		
1.0	.195	.171	.150	.167	.147	.129	.114	.101	.089	.066	.058	.052	.021	.019	.017		
2.0	.186	.147	.114	.160	.127	.098	.109	.088	.069	.063	.051	.040	.020	.016	.013		
3.0	.179	.129	.090	.153	.112	.078	.105	.078	.055	.061	.045	.032	.020	.015	.011		
4.0	.171	.116	.074	.147	.100	.064	.101	.070	.045	.058	.041	.027	.019	.013	.009		
5.0	.164	.106	.063	.141	.091	.055	.097	.064	.039	.056	.038	.023	.018	.012	.008		
6.0	.157	.097	.055	.135	.084	.048	.093	.059	.034	.054	.035	.020	.017	.011	.007		
7.0	.150	.090	.049	.129	.078	.043	.089	.055	.030	.052	.032	.018	.017	.011	.006		
8.0	.143	.085	.044	.123	.073	.039	.085	.052	.027	.050	.030	.016	.016	.010	.005		
9.0	.137	.080	.041	.118	.069	.036	.082	.049	.025	.048	.029	.015	.015	.009	.005		
10.0	.132	.075	.038	.114	.066	.033	.079	.046	.024	.046	.027	.014	.015	.009	.005		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2021-07-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks:

Uncorrected UGR Table

Test:U:118.1V I:0.3420A P:40.20W PF:0.9940 Lamp Flux:5426.94x1 lm											
NAME: LED LINEAR LIGHT					TYPE:down light			WEIGHT:			
DIM.: 4FT					SPEC.:3500K White			SERIAL No.:			
MFR.: YQ					SUR.:0.07*1.2m			PROTECTION ANGLE:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.3	24.7	23.6	25.0	25.2	23.6	25.1	23.9	25.3	25.6	
	3H	24.7	26.0	25.0	26.3	26.6	25.2	26.6	25.6	26.9	27.1
	4H	25.2	26.5	25.5	26.8	27.1	25.9	27.2	26.3	27.5	27.8
	6H	25.5	26.8	25.9	27.1	27.4	26.5	27.7	26.8	28.0	28.3
	8H	25.6	26.8	26.0	27.1	27.4	26.7	27.9	27.1	28.2	28.5
	12H	25.6	26.7	26.0	27.1	27.4	26.9	28.0	27.2	28.3	28.7
4H	2H	23.9	25.2	24.3	25.5	25.8	24.2	25.5	24.5	25.8	26.1
	3H	25.5	26.7	25.9	27.0	27.3	26.0	27.1	26.4	27.5	27.8
	4H	26.2	27.2	26.6	27.6	27.9	26.8	27.9	27.2	28.2	28.6
	6H	26.6	27.6	27.1	27.9	28.3	27.5	28.4	27.9	28.8	29.2
	8H	26.8	27.6	27.2	28.0	28.4	27.8	28.6	28.2	29.0	29.5
	12H	26.8	27.6	27.2	28.0	28.4	28.0	28.8	28.5	29.2	29.7
8H	4H	26.5	27.3	26.9	27.8	28.2	27.1	27.9	27.5	28.3	28.7
	6H	27.1	27.8	27.6	28.3	28.7	27.9	28.6	28.4	29.1	29.5
	8H	27.3	27.9	27.8	28.4	28.9	28.3	28.9	28.8	29.4	29.9
	12H	27.4	27.9	27.9	28.4	28.9	28.6	29.2	29.1	29.6	30.2
12H	4H	26.5	27.3	27.0	27.7	28.2	27.1	27.8	27.5	28.3	28.7
	6H	27.2	27.8	27.7	28.3	28.8	28.0	28.6	28.5	29.0	29.5
	8H	27.4	28.0	27.9	28.4	29.0	28.4	28.9	28.9	29.4	29.9
Variations with the observer position at spacings:											
S = 1.0H	+ 0.2 / - 0.2					+ 0.1 / - 0.2					
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					
2.0H	+ 0.2 / - 0.3					+ 0.1 / - 0.3					

CIE Pub.117 Corrected 5427 lm Total Lamp Luminous Flux.(8log(F/F0) = 5.9)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2021-07-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:118.1V I:0.3420A P:40.20W PF:0.9940 Lamp Flux:5426.94x1 lm		
NAME: LED LINEAR LIGHT	TYPE:down light	WEIGHT:
DIM.: 4FT	SPEC.:3500K White	SERIAL No.:
MFR.: YQ	SUR.:0.07*1.2m	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	58	46	39	57	46	39	56	45	39	33
0.80	68	56	49	67	56	49	65	55	48	41
1.00	76	65	58	75	64	58	72	66	57	50
1.25	83	73	66	82	72	65	79	70	64	57
1.50	88	78	72	86	77	71	83	75	70	62
2.00	95	87	80	93	85	79	89	83	78	69
2.50	99	91	85	97	90	84	93	87	82	73
3.00	102	95	90	100	94	89	95	90	86	77
4.00	106	100	96	104	99	94	99	95	91	82
5.00	108	104	100	106	102	98	101	98	95	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2021-07-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:118.1V I:0.3420A P:40.20W PF:0.9940 Lamp Flux:5426.94x1 lm		
NAME: LED LINEAR LIGHT	TYPE:down light	WEIGHT:
DIM.: 4FT	SPEC.:3500K White	SERIAL No.:
MFR.: YQ	SUR.:0.07*1.2m	PROTECTION ANGLE:

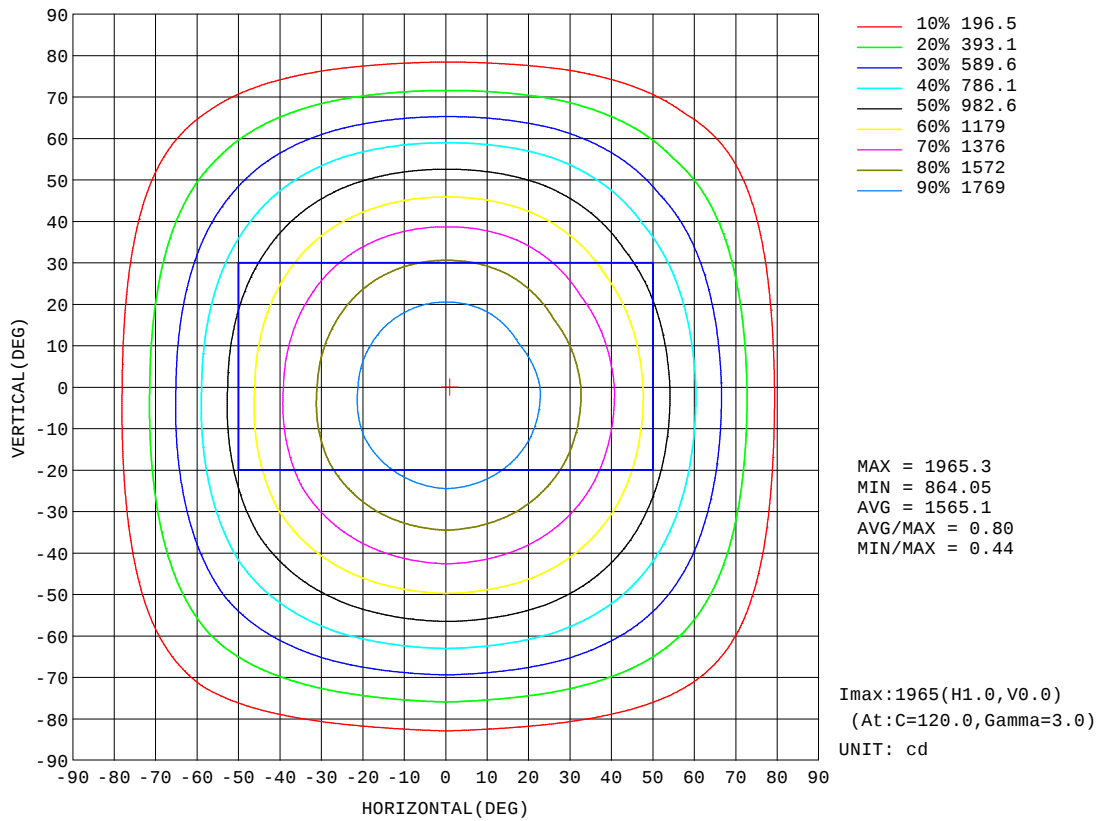


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2021-07-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks:

AAI Figure

Test:U:118.1V I:0.3420A P:40.20W PF:0.9940 Lamp Flux:5426.94x1 lm		
NAME: LED LINEAR LIGHT	TYPE:down light	WEIGHT:
DIM.: 4FT	SPEC.:3500K White	SERIAL No.:
MFR.: YQ	SUR.:0.07*1.2m	PROTECTION ANGLE:

Flux out:3767 lm

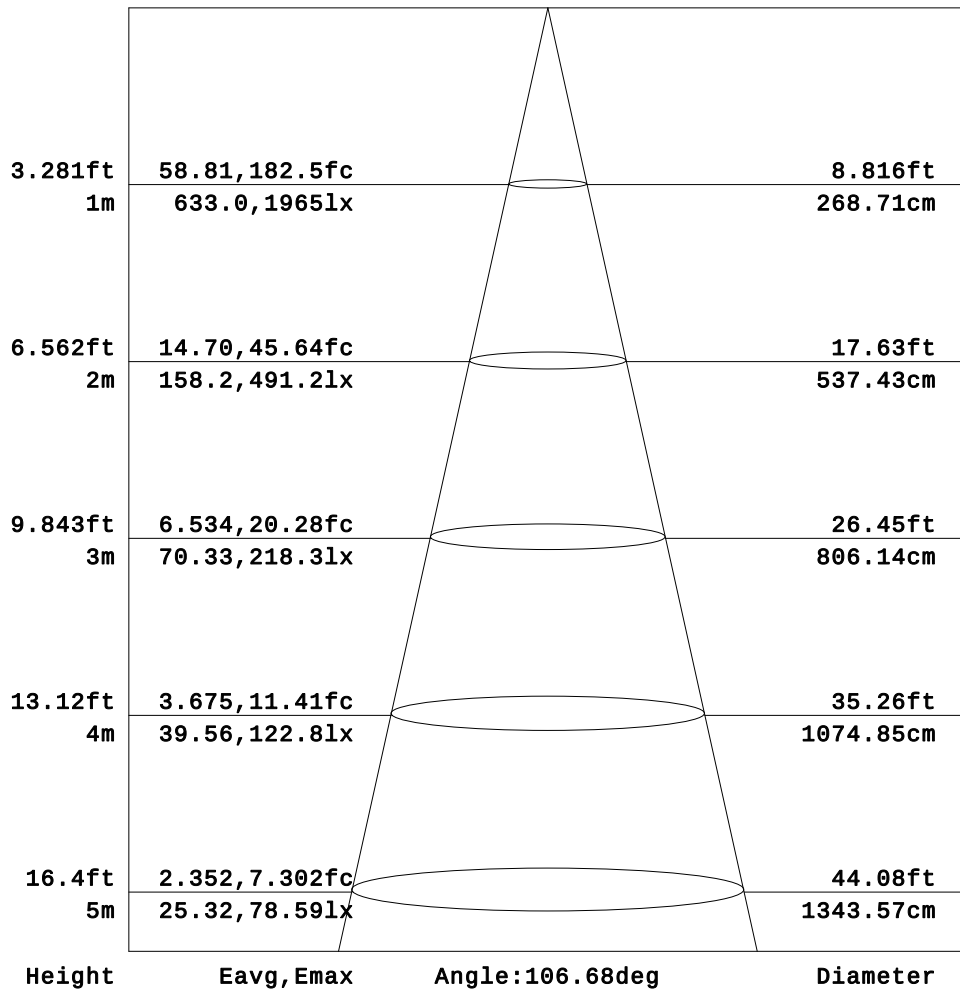


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2021-07-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:118.1V I:0.3420A P:40.20W PF:0.9940 Lamp Flux:5426.94x1 lm		
NAME: LED LINEAR LIGHT	TYPE:down light	WEIGHT:
DIM.: 4FT	SPEC.:3500K White	SERIAL No.:
MFR.: YQ	SUR.:0.07*1.2m	PROTECTION ANGLE:

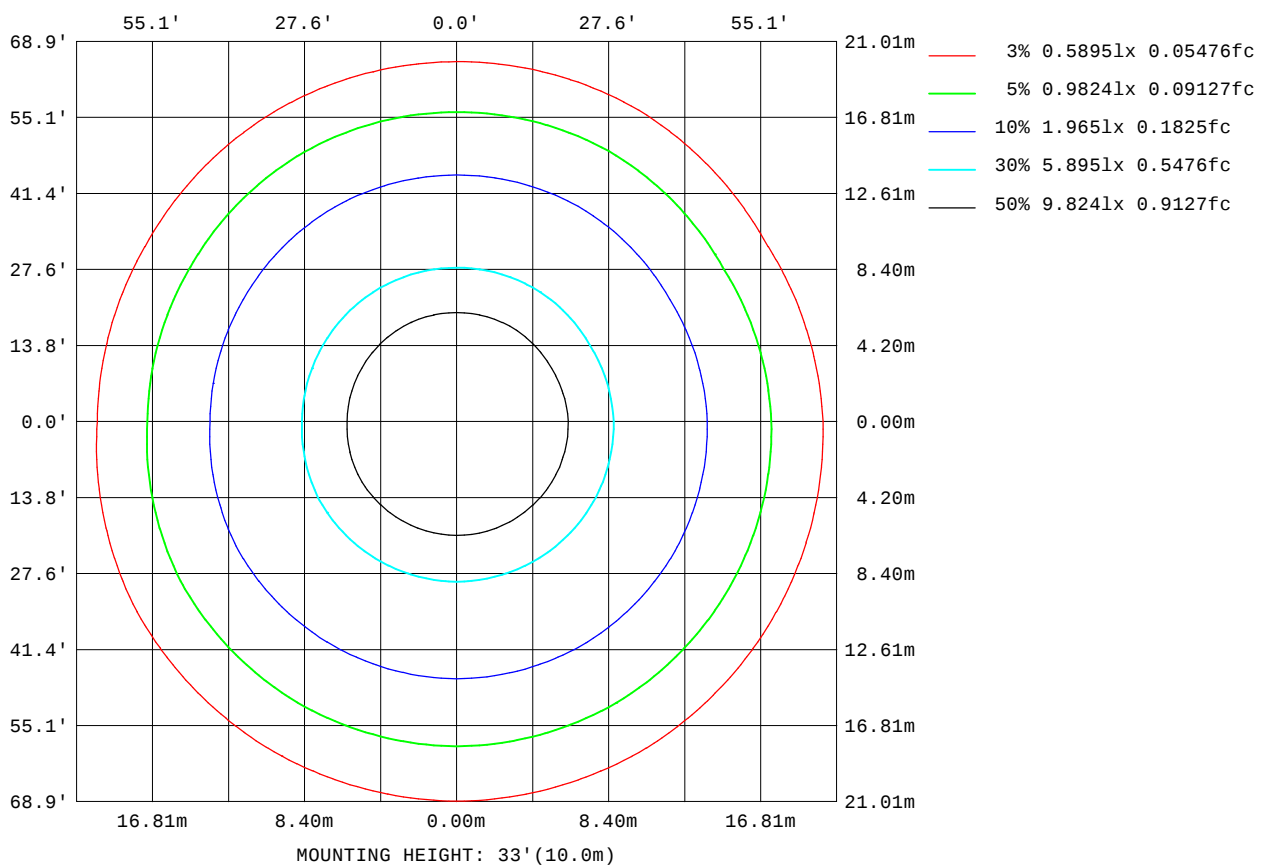

C Range: 0 - 360DEG
C Interval: 30.00DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2021-07-01

γ Range: 0 - 180DEG
γ Interval: 1.00DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks:

Planar Illuminance Curve

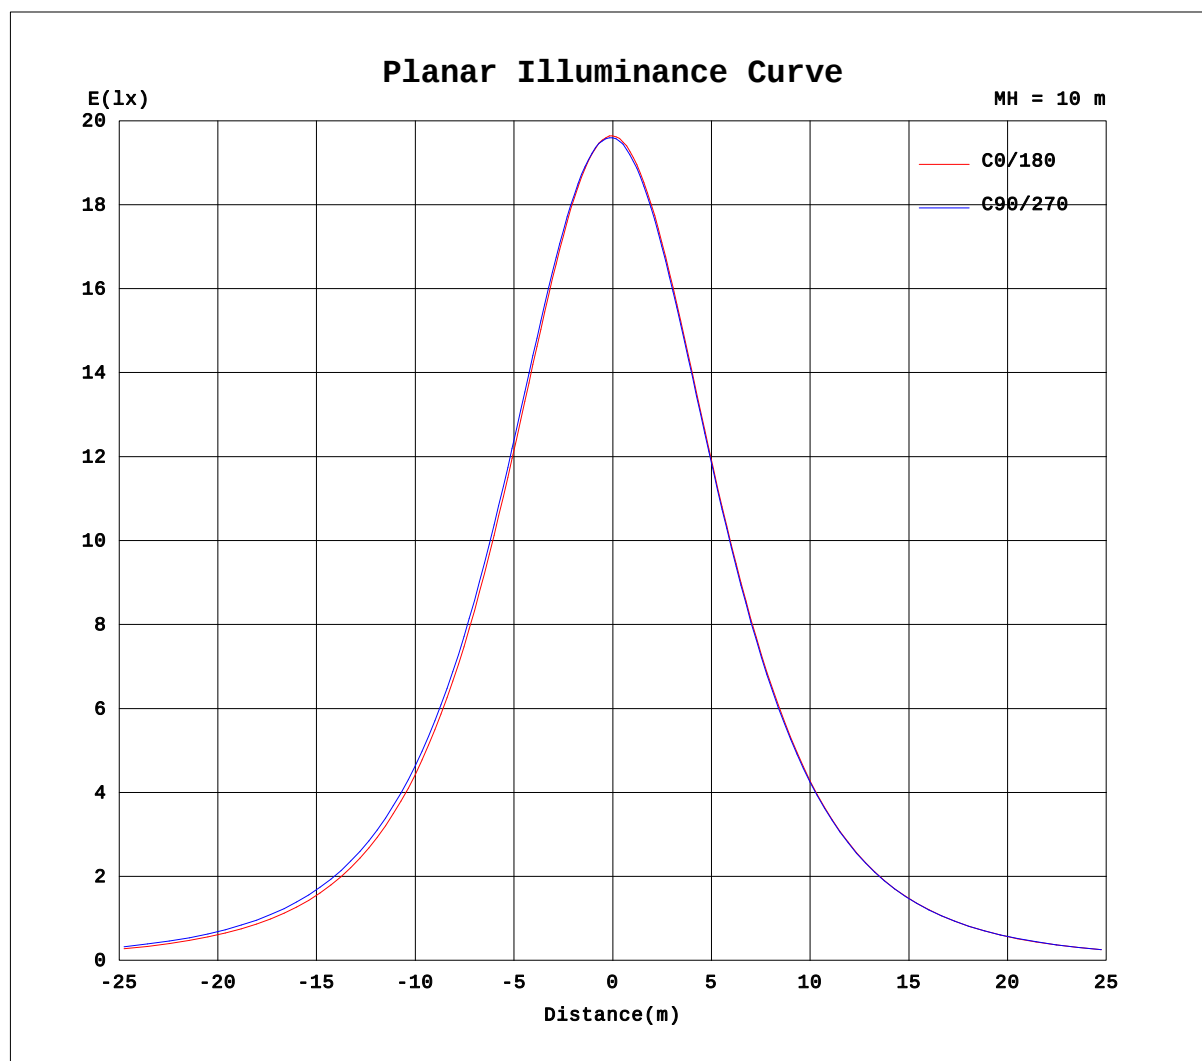

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2021-07-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:118.1V I:0.3420A P:40.20W PF:0.9940 Lamp Flux:5426.94x1 lm		
NAME: LED LINEAR LIGHT	TYPE:down light	WEIGHT:
DIM.: 4FT	SPEC.:3500K White	SERIAL No.:
MFR.: YQ	SUR.:0.07*1.2m	PROTECTION ANGLE:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1960	1960	1960	1960	1960	1960	1960	1960	1960	1960	1960	1960						
5	1952	1955	1957	1959	1956	1954	1945	1943	1943	1942	1943	1943						
10	1924	1930	1935	1937	1933	1930	1910	1906	1906	1905	1908	1909						
15	1876	1885	1892	1895	1891	1883	1855	1850	1849	1849	1854	1852						
20	1807	1822	1832	1836	1829	1820	1782	1776	1778	1776	1782	1781						
25	1725	1741	1755	1761	1752	1738	1694	1685	1688	1687	1693	1689						
30	1626	1647	1662	1668	1658	1642	1589	1581	1584	1584	1591	1587						
35	1513	1537	1554	1561	1551	1533	1475	1464	1469	1467	1475	1471						
40	1390	1415	1434	1442	1431	1412	1350	1339	1342	1340	1349	1343						
45	1252	1284	1303	1313	1298	1283	1209	1201	1205	1202	1211	1206						
50	1105	1139	1166	1173	1160	1138	1060	1052	1060	1058	1067	1057						
55	952	988	1020	1029	1014	987	906	897	910	907	916	901						
60	795	832	869	878	865	832	749	738	754	752	762	740						
65	636	674	713	726	711	675	591	579	594	597	602	580						
70	475	516	555	573	554	518	435	420	436	440	443	420						
75	323	362	398	422	397	365	285	270	285	292	291	267						
80	177	216	252	278	252	221	143	129	145	154	148	125						
85	51.7	78.7	118	144	119	85.2	24.4	16.9	21.8	32.2	22.9	17.4						
90	5.85	8.97	10.7	24.2	10.8	9.13	3.11	3.14	3.68	3.88	4.62	4.91						
95	5.48	5.34	5.17	4.57	4.47	4.01	4.15	4.65	5.30	5.77	5.96	5.87						
100	6.84	6.75	6.86	6.69	6.37	5.81	5.91	6.45	7.23	7.99	7.79	7.41						
105	8.66	8.63	8.94	9.15	8.57	7.90	7.94	8.51	9.37	10.5	9.87	9.33						
110	10.8	10.8	11.2	11.9	10.9	10.2	10.2	10.8	11.7	13.2	12.1	11.5						
115	13.2	13.1	13.5	14.6	13.4	12.7	12.7	13.1	14.0	15.8	14.3	13.8						
120	15.5	15.5	15.8	17.4	15.8	15.2	15.0	15.4	16.2	18.4	16.5	16.0						
125	17.8	17.6	18.0	20.0	18.0	17.5	17.3	17.6	18.3	20.8	18.6	18.1						
130	20.0	19.7	20.1	22.3	20.2	19.8	19.4	19.7	20.4	23.0	20.7	20.0						
135	21.9	21.6	22.1	24.4	22.2	21.8	21.3	21.6	22.3	25.0	22.8	21.9						
140	23.7	23.4	24.0	26.3	24.3	23.7	23.0	23.4	24.3	26.8	24.8	23.7						
145	25.2	25.2	25.9	28.0	26.4	25.3	24.5	25.1	26.4	28.5	26.8	25.6						
150	26.7	27.0	27.7	29.5	28.4	26.9	26.1	26.8	28.5	30.1	28.7	27.8						
155	28.2	29.0	29.5	31.0	30.4	28.7	27.8	28.7	30.5	31.8	30.6	30.1						
160	30.1	31.1	31.5	32.5	32.4	30.6	30.1	30.7	32.4	33.5	32.3	32.0						
165	32.3	33.2	33.2	34.2	34.3	32.5	32.8	32.7	34.4	35.2	34.0	34.0						
170	34.7	35.0	34.8	35.8	35.9	34.5	35.4	34.7	35.9	36.6	35.7	35.7						
175	37.2	36.6	36.4	37.3	37.2	36.3	37.8	36.4	37.1	37.6	37.0	37.0						
180	38.8	37.3	37.5	38.2	37.9	37.5	38.8	37.2	37.5	38.2	37.9	37.5						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2021-07-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: