


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:118.1V I:0.3520A P:41.40W PF:0.9940 Lamp Flux:5321.21x1 lm		
NAME: LED LINEAR LIGHT	TYPE:down light	WEIGHT:
DIM.: 4FT	SPEC.:4000K White	SERIAL No.:
MFR.: YQ	SUR.:0.07*1.2m	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 128.53 lm/W			
MODEL		I _{max} (cd)	1923	S/MH(C0/180)	1.24
NOMINAL POWER(W)	40	LOR(%)	100.0	S/MH(C90/270)	1.26
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	5321.2	η UP, DN(C0-180)	1.0, 51.4
NOMINAL FLUX(lm)	5321.21	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.0, 46.7
LAMPS INSIDE	1	η up(%)	1.9	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	118.1	η down(%)	98.1	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

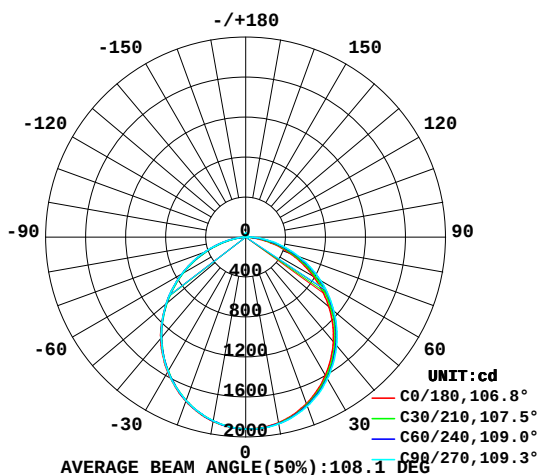

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

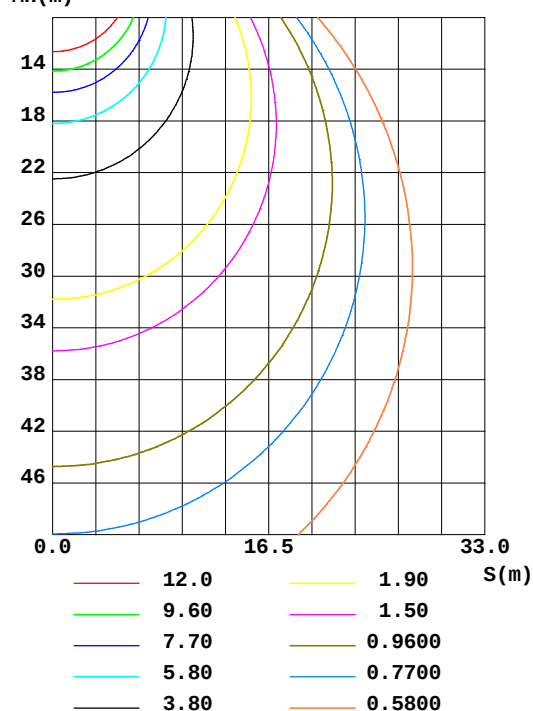


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 26.3DEG
 Operators: Ethan
 Test Date: 2021-07-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.268
 Humidity: 36%
 Test Distance: 6.770m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM AND LUMINANCE LIMITATION CURVES

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	ϕ zone	ϕ total	%lum, lamp
10	1887	1894	1898	1892	1872	1869	1867	1871	0- 10	181.4	181.4	3.41, 3.41
20	1775	1791	1800	1788	1748	1742	1741	1744	10- 20	516.8	698.3	13.1, 13.1
30	1596	1622	1635	1617	1560	1551	1555	1556	20- 30	775.5	1474	27.7, 27.7
40	1365	1398	1415	1393	1323	1312	1314	1317	30- 40	923.2	2397	45, 45
50	1087	1131	1151	1127	1039	1034	1038	1039	40- 50	942.9	3340	62.8, 62.8
60	782.1	834.9	862.8	833.0	733.8	729.5	737.2	735.5	50- 60	834.6	4174	78.4, 78.4
70	468.7	526.4	563.5	526.7	425.4	418.7	431.1	422.1	60- 70	620.8	4795	90.1, 90.1
80	175.3	230.7	273.2	232.8	139.8	133.0	150.5	133.0	70- 80	342.6	5138	96.6, 96.6
90	5.817	10.00	24.22	10.18	3.035	3.362	3.821	4.679	80- 90	79.78	5217	98.1, 98.1
100	6.685	6.656	6.557	5.970	5.816	6.737	7.858	7.483	90-100	5.838	5223	98.2, 98.2
110	10.61	10.77	11.64	10.38	10.08	11.05	12.94	11.63	100-110	9.316	5233	98.3, 98.3
120	15.23	15.34	17.02	15.19	14.80	15.56	18.07	15.97	110-120	13.31	5246	98.6, 98.6
130	19.58	19.54	21.88	19.58	19.11	19.71	22.60	20.01	120-130	16.08	5262	98.9, 98.9
140	23.24	23.26	25.81	23.53	22.68	23.45	26.34	23.83	130-140	16.99	5279	99.2, 99.2
150	26.15	26.84	28.91	27.12	25.68	27.18	29.62	27.78	140-150	16.04	5295	99.5, 99.5
160	29.57	30.69	31.89	30.90	29.64	31.00	32.93	31.61	150-160	13.45	5309	99.8, 99.8
170	34.04	34.30	35.20	34.53	34.88	34.69	35.92	35.04	160-170	9.275	5318	99.9, 99.9
180	38.00	36.74	37.50	36.93	38.10	36.74	37.47	36.95	170-180	3.418	5321	100, 100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

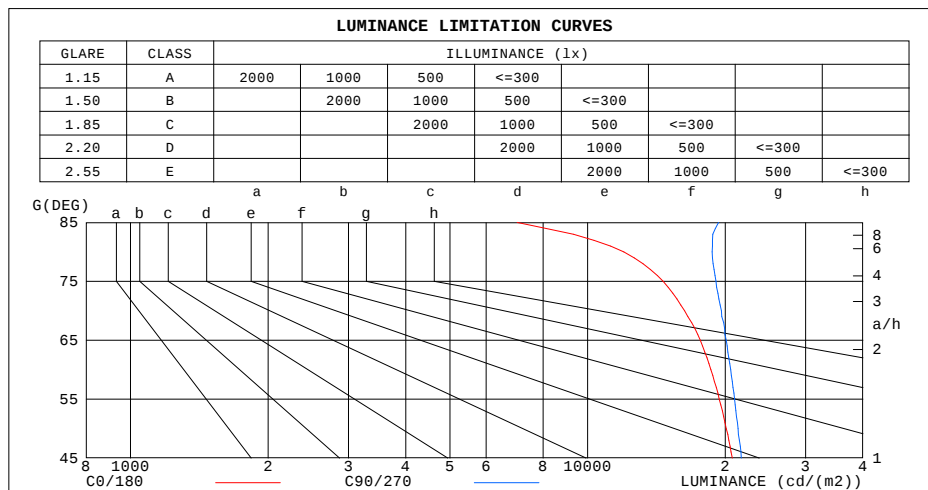

LUMINANCE cd/(m2)		
G(°)	C0/180	C90/270
85	7021	19350
80	12011	18739
75	14637	19105
70	16306	19624
65	17636	20103
60	18614	20556
55	19420	20967
50	20124	21333
45	20727	21704


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2021-07-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:118.1V I:0.3520A P:41.40W PF:0.9940 Lamp Flux:5321.21x1 lm		
NAME: LED LINEAR LIGHT	TYPE:down light	WEIGHT:
DIM.: 4FT	SPEC.:4000K White	SERIAL No.:
MFR.: YQ	SUR.:0.07*1.2m	PROTECTION ANGLE:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.00	1.00	1.00	.98
1.0	1.04	.90	.96	1.01	.98	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.91	.84	.78	.89	.82	.77	.85	.80	.75	.81	.77	.73	.78	.74	.71	.69
3.0	.80	.72	.65	.78	.71	.64	.75	.68	.63	.72	.66	.62	.69	.64	.60	.58
4.0	.71	.62	.55	.69	.61	.55	.66	.59	.54	.64	.58	.53	.62	.56	.52	.50
5.0	.63	.54	.48	.62	.54	.47	.60	.52	.47	.57	.51	.46	.55	.50	.45	.43
6.0	.57	.48	.42	.56	.47	.41	.54	.46	.41	.52	.45	.40	.50	.44	.40	.38
7.0	.52	.43	.37	.51	.42	.37	.49	.42	.36	.47	.41	.36	.46	.40	.35	.33
8.0	.47	.39	.33	.46	.38	.33	.45	.38	.32	.43	.37	.32	.42	.36	.32	.30
9.0	.43	.35	.30	.43	.35	.29	.41	.34	.29	.40	.34	.29	.39	.33	.29	.27
10.0	.40	.32	.27	.39	.32	.27	.38	.31	.26	.37	.31	.26	.36	.30	.26	.24

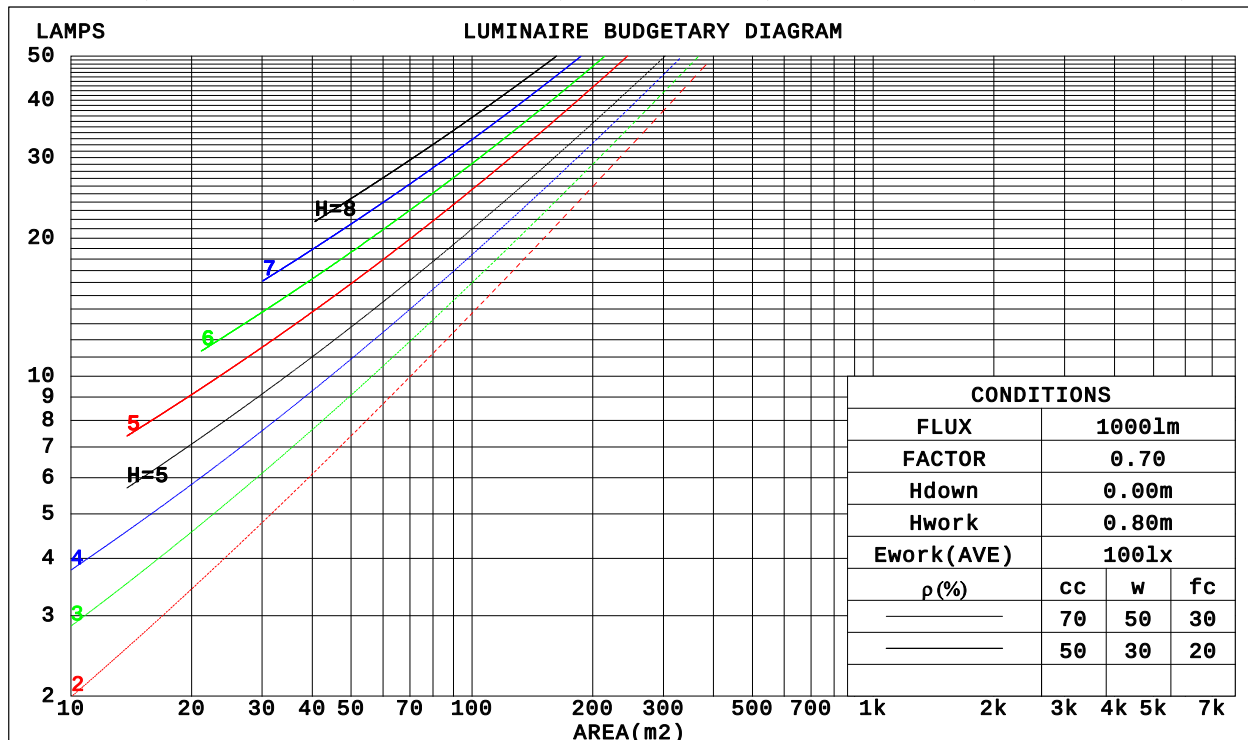

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 26.3DEG
 Operators: Ethan
 Test Date: 2021-07-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity: 36%
 Test Distance: 6.770m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:118.1V I:0.3520A P:41.40W PF:0.9940 Lamp Flux:5321.21x1 lm					
NAME: LED LINEAR LIGHT			TYPE:down light		WEIGHT:
DIM.: 4FT			SPEC.:4000K White		SERIAL No.:
MFR.: YQ			SUR.:0.07*1.2m		PROTECTION ANGLE:

ρ_{cc}	80%			70%			50%			30%			10%			0	
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ_{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.301	.171	.054	.294	.167	.053	.279	.160	.051	.266	.153	.049	.254	.147	.047		
2.0	.285	.156	.048	.278	.153	.047	.266	.148	.046	.254	.143	.045	.243	.138	.043		
3.0	.265	.141	.042	.259	.139	.042	.248	.134	.041	.237	.130	.040	.228	.126	.039		
4.0	.245	.127	.037	.240	.125	.037	.230	.122	.036	.220	.118	.036	.212	.115	.035		
5.0	.227	.116	.033	.222	.114	.033	.213	.111	.033	.205	.108	.032	.197	.105	.032		
6.0	.211	.106	.030	.206	.104	.030	.199	.102	.030	.191	.099	.029	.184	.097	.029		
7.0	.196	.097	.028	.193	.096	.027	.185	.094	.027	.179	.092	.027	.172	.090	.026		
8.0	.184	.090	.025	.180	.089	.025	.174	.087	.025	.168	.085	.024	.162	.083	.024		
9.0	.172	.083	.023	.169	.082	.023	.163	.081	.023	.158	.079	.023	.153	.078	.022		
10.0	.162	.078	.022	.159	.077	.021	.154	.075	.021	.149	.074	.021	.144	.073	.021		

ρcc	80%			70%			50%			30%			10%			0	
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)										
0.0	.205	.205	.205	.175	.175	.175	.120	.120	.120	.069	.069	.069	.022	.022	.022		
1.0	.195	.171	.150	.167	.147	.129	.114	.101	.089	.066	.058	.052	.021	.019	.017		
2.0	.186	.147	.114	.160	.127	.098	.109	.088	.069	.063	.051	.040	.020	.016	.013		
3.0	.179	.129	.090	.153	.112	.078	.105	.078	.055	.061	.045	.032	.020	.015	.011		
4.0	.171	.116	.074	.147	.100	.064	.101	.070	.045	.058	.041	.027	.019	.013	.009		
5.0	.164	.106	.063	.141	.091	.055	.097	.064	.039	.056	.038	.023	.018	.012	.008		
6.0	.157	.097	.055	.135	.084	.048	.093	.059	.034	.054	.035	.020	.017	.011	.007		
7.0	.150	.090	.049	.129	.078	.043	.089	.055	.030	.052	.032	.018	.017	.011	.006		
8.0	.143	.085	.044	.123	.073	.039	.085	.052	.027	.050	.030	.016	.016	.010	.005		
9.0	.137	.080	.041	.118	.069	.036	.082	.049	.025	.048	.029	.015	.015	.009	.005		
10.0	.132	.076	.038	.114	.066	.033	.079	.046	.024	.046	.027	.014	.015	.009	.005		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2021-07-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks:

Uncorrected UGR Table

Test:U:118.1V I:0.3520A P:41.40W PF:0.9940 Lamp Flux:5321.21x1 lm											
NAME: LED LINEAR LIGHT					TYPE:down light			WEIGHT:			
DIM.: 4FT					SPEC.:4000K White			SERIAL No.:			
MFR.: YQ					SUR.:0.07*1.2m			PROTECTION ANGLE:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.2	24.7	23.5	24.9	25.1	23.6	25.0	23.9	25.3	25.5	
	3H	24.6	26.0	24.9	26.2	26.5	25.2	26.5	25.5	26.8	27.1
	4H	25.1	26.4	25.5	26.7	27.0	25.9	27.2	26.2	27.4	27.7
	6H	25.5	26.7	25.8	27.0	27.3	26.4	27.6	26.8	27.9	28.3
	8H	25.5	26.7	25.9	27.0	27.4	26.6	27.8	27.0	28.1	28.5
	12H	25.6	26.7	25.9	27.0	27.4	26.8	27.9	27.2	28.3	28.6
4H	2H	23.9	25.1	24.2	25.4	25.7	24.1	25.4	24.5	25.7	26.0
	3H	25.5	26.6	25.8	26.9	27.3	25.9	27.1	26.3	27.4	27.7
	4H	26.1	27.1	26.5	27.5	27.9	26.8	27.8	27.2	28.2	28.5
	6H	26.6	27.5	27.0	27.9	28.3	27.5	28.4	27.9	28.8	29.2
	8H	26.7	27.5	27.1	27.9	28.4	27.7	28.6	28.2	29.0	29.4
	12H	26.7	27.5	27.2	27.9	28.4	28.0	28.8	28.4	29.2	29.6
8H	4H	26.4	27.3	26.9	27.7	28.1	27.0	27.9	27.5	28.3	28.7
	6H	27.0	27.8	27.5	28.2	28.7	27.9	28.6	28.3	29.0	29.5
	8H	27.2	27.9	27.7	28.3	28.8	28.2	28.9	28.7	29.3	29.8
	12H	27.3	27.9	27.8	28.4	28.9	28.6	29.1	29.1	29.6	30.1
12H	4H	26.5	27.2	26.9	27.7	28.1	27.0	27.8	27.5	28.2	28.7
	6H	27.1	27.8	27.6	28.2	28.7	27.9	28.5	28.4	29.0	29.5
	8H	27.4	27.9	27.9	28.4	28.9	28.3	28.9	28.8	29.4	29.9
Variations with the observer position at spacings:											
S = 1.0H	+ 0.2 / - 0.2					+ 0.1 / - 0.2					
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					
2.0H	+ 0.2 / - 0.3					+ 0.1 / - 0.3					

CIE Pub.117 Corrected 5321 lm Total Lamp Luminous Flux.(8log(F/F0) = 5.8)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2021-07-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:118.1V I:0.3520A P:41.40W PF:0.9940 Lamp Flux:5321.21x1 lm		
NAME: LED LINEAR LIGHT	TYPE:down light	WEIGHT:
DIM.: 4FT	SPEC.:4000K White	SERIAL No.:
MFR.: YQ	SUR.:0.07*1.2m	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	58	46	39	57	46	39	56	45	39	33
0.80	68	56	49	67	56	49	65	55	48	41
1.00	76	65	58	75	64	58	72	66	57	50
1.25	83	73	66	82	72	65	79	70	64	57
1.50	88	78	72	86	77	71	83	75	70	62
2.00	95	87	80	93	85	79	89	83	78	69
2.50	99	91	85	97	90	84	93	87	82	73
3.00	102	95	90	100	94	89	95	90	86	77
4.00	106	100	96	104	99	94	99	95	91	82
5.00	108	104	100	106	102	98	101	98	95	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2021-07-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:118.1V I:0.3520A P:41.40W PF:0.9940 Lamp Flux:5321.21x1 lm		
NAME: LED LINEAR LIGHT	TYPE:down light	WEIGHT:
DIM.: 4FT	SPEC.:4000K White	SERIAL No.:
MFR.: YQ	SUR.:0.07*1.2m	PROTECTION ANGLE:

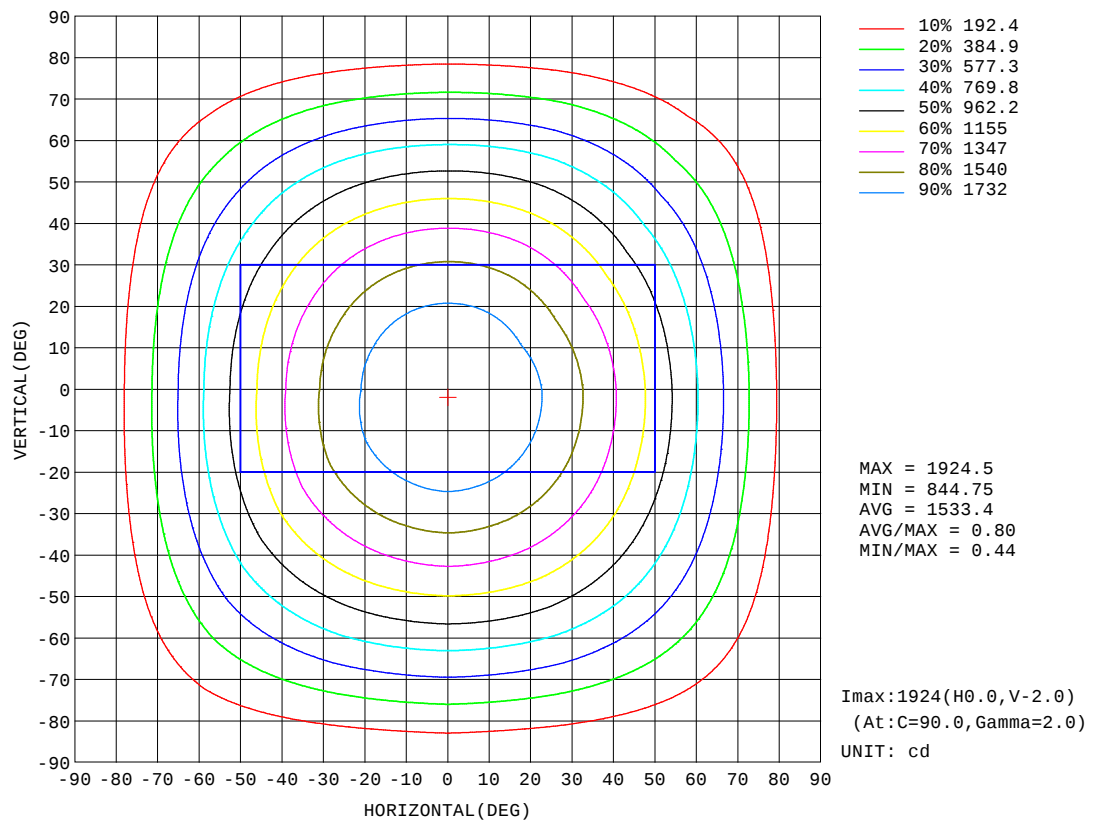


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2021-07-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks:

AAI Figure

Test:U:118.1V I:0.3520A P:41.40W PF:0.9940 Lamp Flux:5321.21x1 lm		
NAME: LED LINEAR LIGHT	TYPE:down light	WEIGHT:
DIM.: 4FT	SPEC.:4000K White	SERIAL No.:
MFR.: YQ	SUR.:0.07*1.2m	PROTECTION ANGLE:

Flux out:3693 lm

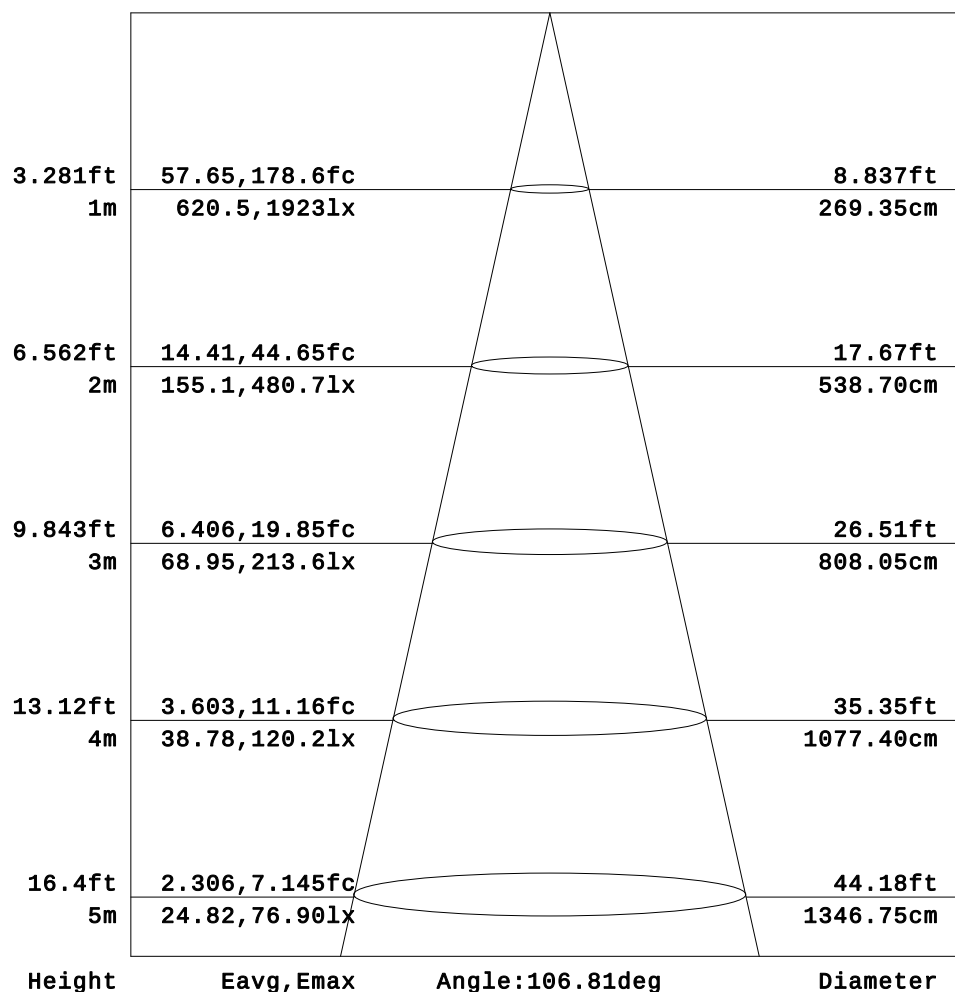


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2021-07-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:118.1V I:0.3520A P:41.40W PF:0.9940 Lamp Flux:5321.21x1 lm		
NAME: LED LINEAR LIGHT	TYPE:down light	WEIGHT:
DIM.: 4FT	SPEC.:4000K White	SERIAL No.:
MFR.: YQ	SUR.:0.07*1.2m	PROTECTION ANGLE:

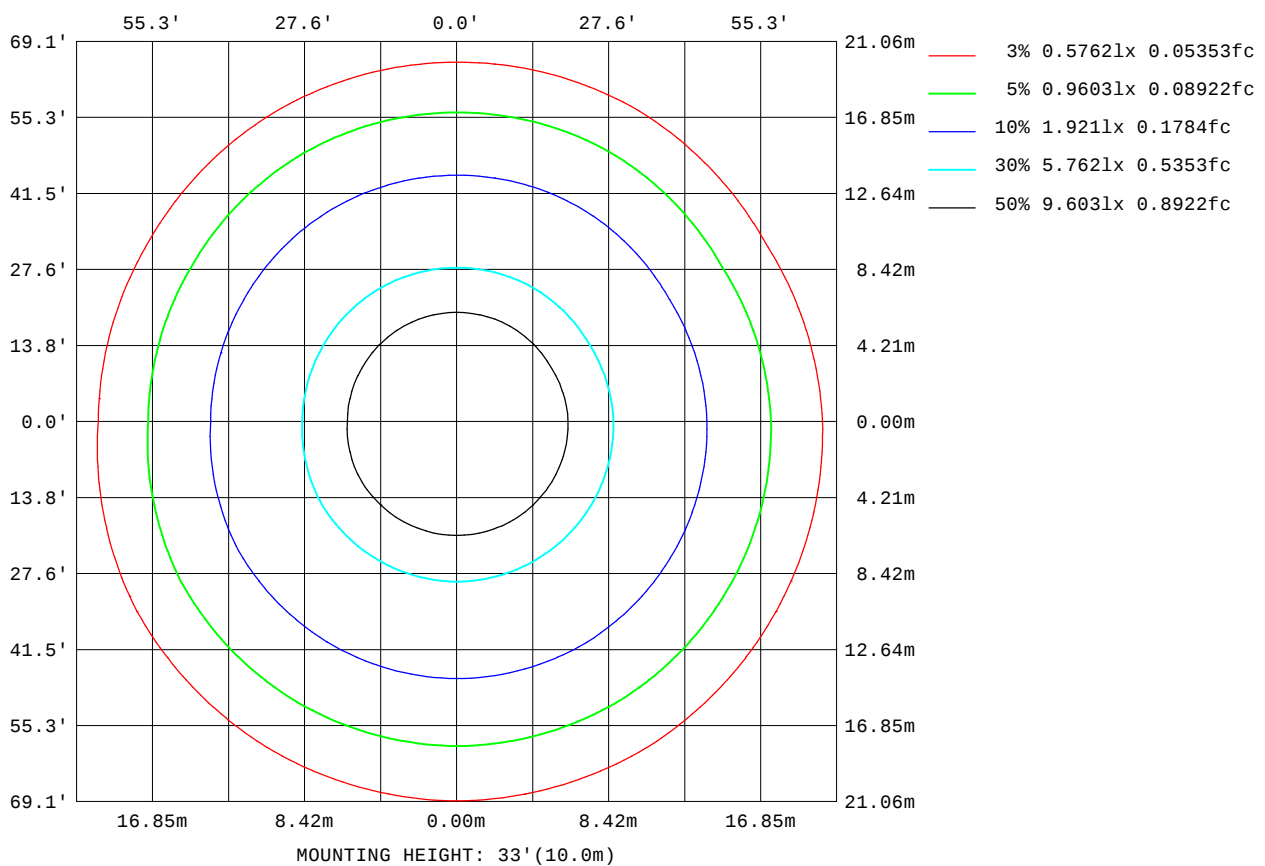

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 26.3DEG
 Operators: Ethan
 Test Date: 2021-07-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.268
 Humidity: 36%
 Test Distance: 6.770m [K=1.0000]
 Remarks:

Planar Illuminance Curve

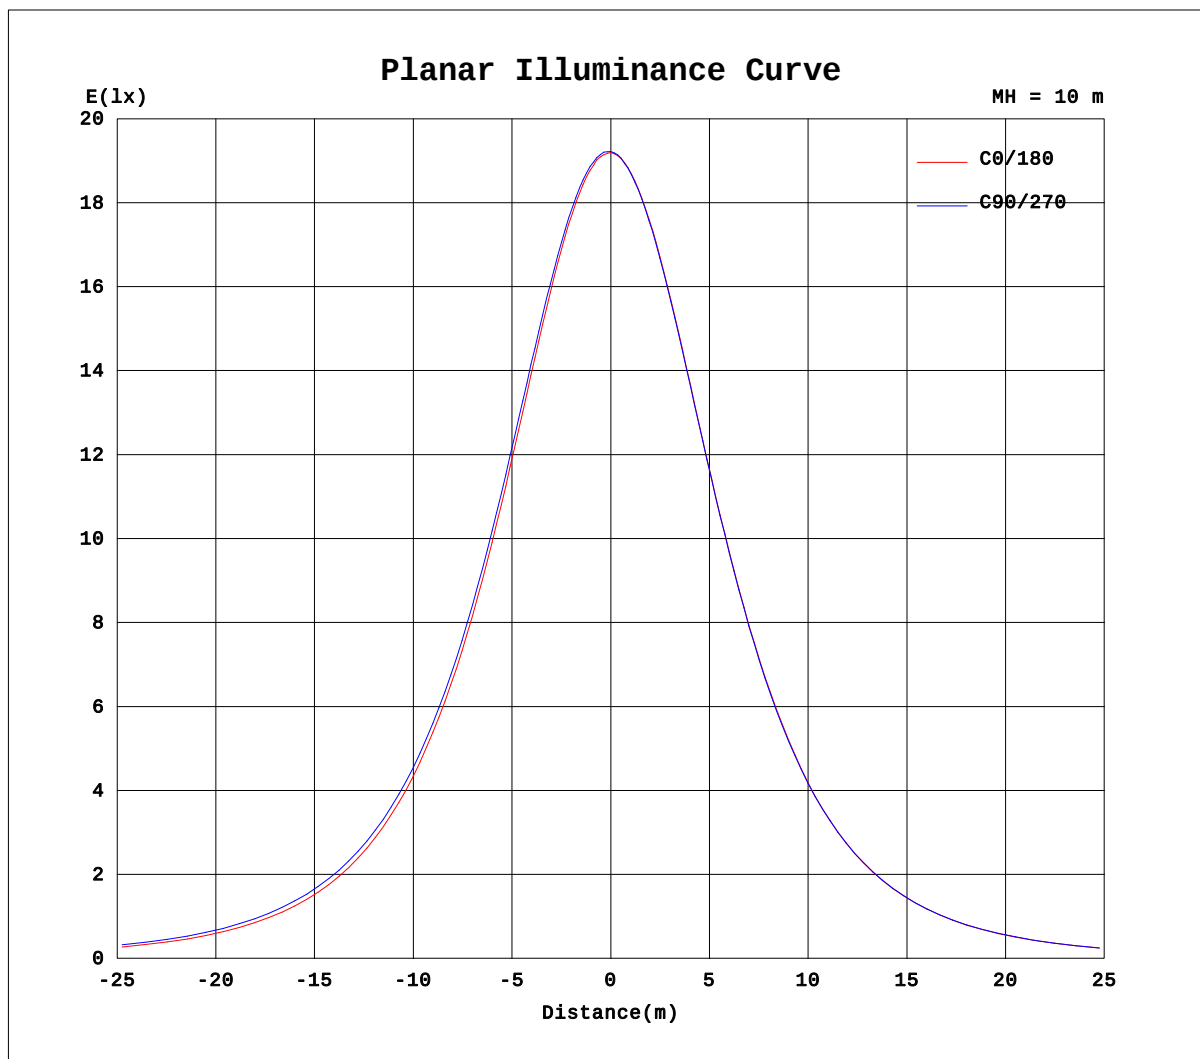

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2021-07-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:118.1V I:0.3520A P:41.40W PF:0.9940 Lamp Flux:5321.21x1 lm		
NAME: LED LINEAR LIGHT	TYPE:down light	WEIGHT:
DIM.: 4FT	SPEC.:4000K White	SERIAL No.:
MFR.: YQ	SUR.:0.07*1.2m	PROTECTION ANGLE:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1921	1921	1921	1921	1921	1921	1921	1921	1921	1921	1921	1921						
5	1912	1916	1918	1918	1916	1916	1907	1904	1904	1904	1905	1905						
10	1887	1892	1896	1898	1894	1890	1872	1869	1869	1867	1869	1872						
15	1840	1849	1853	1858	1853	1846	1818	1812	1814	1812	1817	1816						
20	1775	1787	1796	1800	1793	1783	1748	1741	1742	1741	1745	1742						
25	1693	1707	1719	1727	1717	1704	1659	1651	1652	1655	1659	1656						
30	1596	1614	1630	1635	1625	1609	1560	1549	1552	1555	1558	1554						
35	1487	1507	1524	1533	1520	1502	1447	1435	1438	1440	1444	1439						
40	1365	1389	1407	1415	1401	1385	1323	1311	1314	1314	1320	1314						
45	1232	1261	1279	1288	1275	1259	1185	1176	1177	1180	1186	1179						
50	1087	1118	1144	1151	1137	1117	1039	1030	1037	1038	1045	1033						
55	936	969	1002	1010	995	969	888	878	890	890	898	881						
60	782	816	854	863	849	817	734	722	737	737	746	725						
65	626	661	701	713	698	663	579	567	581	585	589	568						
70	469	507	546	563	544	509	425	411	427	431	433	411						
75	318	356	392	415	391	360	278	263	279	286	284	261						
80	175	213	249	273	248	217	140	125	141	150	144	122						
85	51.4	77.8	117	142	118	84.5	23.4	16.1	20.3	31.1	21.3	16.6						
90	5.82	8.96	11.1	24.2	11.3	9.08	3.04	3.09	3.63	3.82	4.55	4.81						
95	5.36	5.22	5.05	4.48	4.36	3.93	4.09	4.58	5.23	5.68	5.88	5.77						
100	6.68	6.61	6.71	6.56	6.24	5.69	5.82	6.35	7.13	7.86	7.67	7.29						
105	8.48	8.45	8.74	8.97	8.39	7.74	7.82	8.37	9.22	10.3	9.71	9.18						
110	10.6	10.6	10.9	11.6	10.7	10.0	10.1	10.6	11.5	12.9	11.9	11.3						
115	12.9	12.9	13.2	14.4	13.1	12.5	12.5	12.9	13.7	15.5	14.1	13.5						
120	15.2	15.2	15.5	17.0	15.5	14.9	14.8	15.2	15.9	18.1	16.2	15.7						
125	17.5	17.3	17.7	19.6	17.7	17.2	17.0	17.4	18.0	20.4	18.3	17.8						
130	19.6	19.3	19.8	21.9	19.8	19.4	19.1	19.4	20.0	22.6	20.3	19.7						
135	21.5	21.2	21.7	24.0	21.7	21.4	21.0	21.3	21.9	24.5	22.4	21.5						
140	23.2	22.9	23.6	25.8	23.8	23.2	22.7	23.0	23.9	26.3	24.4	23.3						
145	24.7	24.7	25.5	27.5	25.8	24.9	24.2	24.7	25.9	28.0	26.3	25.2						
150	26.1	26.5	27.2	28.9	27.8	26.4	25.7	26.4	28.0	29.6	28.2	27.3						
155	27.6	28.5	28.9	30.4	29.8	28.2	27.4	28.3	30.0	31.3	30.0	29.5						
160	29.6	30.5	30.8	31.9	31.7	30.1	29.6	30.2	31.8	32.9	31.7	31.5						
165	31.7	32.6	32.6	33.6	33.6	31.9	32.3	32.1	33.7	34.6	33.3	33.5						
170	34.0	34.4	34.2	35.2	35.2	33.8	34.9	34.2	35.2	35.9	35.0	35.1						
175	36.5	36.0	35.7	36.6	36.5	35.6	37.3	35.8	36.4	37.0	36.3	36.3						
180	38.1	36.7	36.8	37.5	37.1	36.7	38.1	36.7	36.8	37.5	37.1	36.8						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2021-07-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: