

ECLIPSE

SEMI CUT/FULL CUT WALLPACK INSTALLATION INSTRUCTIONS

Installation and Electrical Connection:




⚠ WARNING


RISK OF FIRE, ELECTRIC SHOCK OR PERSONAL INJURY
Before installation, turn power off.

Installation steps:

1. Selectively open any outlet holes in the four outlet holes of the rear housing with a screwdriver, coat the back of the housing with gaskets, and secure the rear housing with screws with the installation frame provided by the customer.


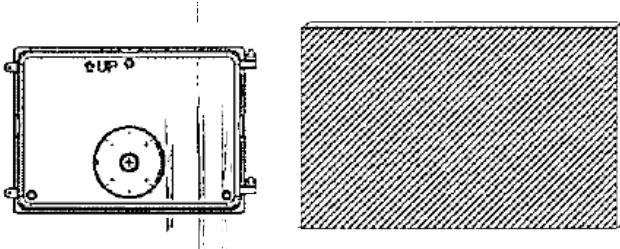


2. Open the two screws on the front and rear housing.

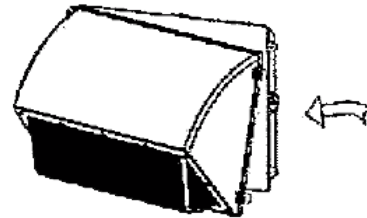

3. Please connect all cables and terminals according to the wiring diagram. Please pay attention to the grounding.

4. Tighten the two screws on the front and rear housing, to ensure rain tight seal, apply silicone caulking around back edges of fixture.

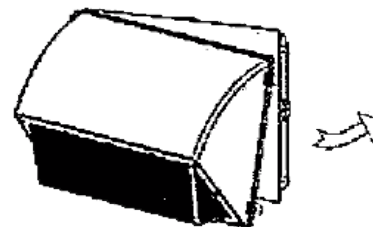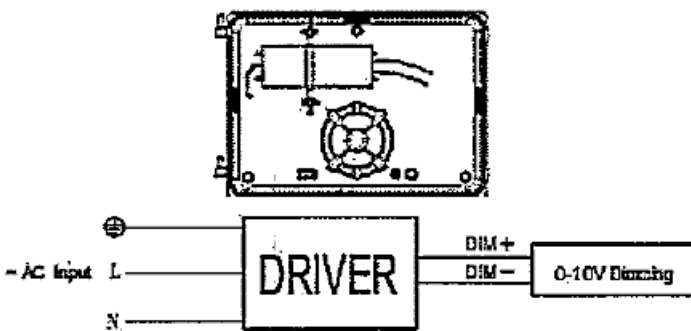

©Intrinsix. Unauthorized use or reproduction of illustrations, photographs or text is prohibited.
Intrinsix reserves the right to discontinue products or to change the technical and/or design specifications at any time.

Installation Instructions

Important Cautions:

- READ THE INSTRUCTIONS CAREFULLY BEFORE INSTALLING. KEEP THESE INSTRUCTIONS FOR FUTURE REFERENCE.
- FIXTURES MUST BE WIRED IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE AND ALL APPLICABLE LOCAL CODES. PROPER GROUNDING IS REQUIRED FOR SAFETY.
- TO AVOID THE RISK OF FIRE, EXPLOSION, OR ELECTRIC SHOCK, THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A QUALIFIED ELECTRICIAN WHO IS FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

Warning:

1. Be certain electrical power is OFF before and during installation and maintenance, to avoid fire, electric shock.
2. This luminaire must be installed in accordance with the NEC or your local electrical code.
3. Lamps and lanterns installation requires knowledge of luminaires and electrical systems. If not qualified, DO NOT try to install. Please contact an electrician.
4. This luminaire is suitable for dry, damp and wet locations. Do not operate in ambient temperatures above those indicated on the luminaire nameplate.
5. Before installation, please check if the local voltage range is corresponds with the working voltage of the fixture.
6. Luminaire must be connected to a wiring system with an equipment-grounding conductor, to avoid fire, electric shock.
7. Use Min 90 supply conductors connection.
8. Please keep the fixture out of fire, electric shock, vibration.
9. Please don't install where the marked operating temperatures exceed the ignition temperature of the hazardous atmosphere, to avoid fire, explosion.
10. Please don't install in unstable, loose or breakable surfaces.
11. Please don't let objects impact or exert force on the surface of the fixture.
12. Please don't cover fixture with insulation liner or similar material.
13. After installation, please check whether the lighting fixture is firmly secured; check whether wires are connected correctly.
14. Finally turn on the power, and check if the lighting fixture works well. If not, please turn off and contact with local dealer.
15. If the fixture is damaged, it should be replaced by the supplier, a service agent or a qualified person.